






40W LED backlit panel 600x600 with CREE CHIP colorcode: 4000K 120lm/W 6yrs warranty


SKU 241456 EAN 3800170254268 VT-61044

Related products (SKUs): 241466



TECHNICAL SPECIFICATION

Power	40W	Frequency	50/60Hz	Pack width	360mm
Luminous flux (lm)	4800 lm	Power factor	>0,9	Pack height	620mm
Light color	Neutral white	CRI	80+	Master carton	10
Color temperature	4000K	Material	Plastic	Brand	V-TAC
Beam angle	110°	Housing color	Matte opal	Warranty	6y
Voltage	230V	Type	Frame/Recessed	Certifications	CE, EMC, ROHS
SKU	SKU 241456	Dimming	NIE	Efficacy (lm/W)	120 lm/W
EAN barcode	3800170254268	IP rating	IP20	ETIM	EC002892
Product code	VT-61044	Ignition time (100%)	0.001s	CN code	8539 51 00
Series	Ceiling lighting	On/Off cycles	>25000	EPREL	2420057
Energy class	E	Operating conditions	-20° +35°		
Base	Integrated LED fixture	Size	595x595x33mm		
Shape	Square	Height	33mm		
LED module type	CREE LED	Product weight	1,49		
Lifetime	50000h	Volume	0,014982		
Input voltage	AC:220-240V, 50/60Hz	Pack length	600mm		

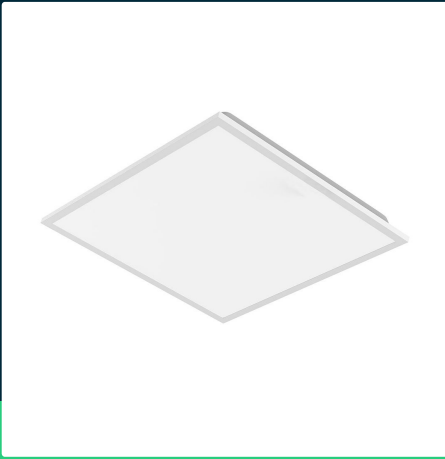

40W LED backlit panel 600x600 with CREE CHIP colorcode: 4000K 120lm/W 6yrs warranty

SKU 241456 EAN 3800170254268 VT-61044

Related products (SKUs): 241466

Product description

- 6-year warranty
- A new generation of panel with CREE chip technology and a high-quality Starsense power supply ensuring high reliability and long life
- CREE LED is a global leader in LED technology with over 35 years of experience, 1800 patents and exceptional performance and precision
- The panel is designed for strong, uniform lighting and high light efficiency
- Product description
- Backlit LED panel with FE PS structure intended for modular ceilings. It provides strong, even lighting and high comfort of use.
- Made of durable materials, ensuring lightness and easy installation.
- The panel uses CREE LED technology and an efficient Starsense driver, which guarantees high energy efficiency, low loss and long operating time of up to 50000 hours.
- Adapted to work with the 1050mA driver. An ideal solution for lighting offices, conference rooms, showrooms and commercial premises.
- The design ensures a wide viewing angle and uniform, flicker-free light.
- Possibility of hanging using accessory V-TAC cables SKU 6018 (available separately)

GPSR Information

- Manufacturer: V-TAC Europe Ltd. Address: bul. "Rozhen" 41, 1271 Sofia, Bulgaria, office@v-tac.eu
- Importer: V-TAC Europe Ltd. Address: bul. "Rozhen" 41, 1271 Sofia, Bulgaria, office@v-tac.eu
- Distributor and importer in Poland: Led Europe Sp. z o.o. Address: ul. Starorudzka 12E 93-491 Łódź, Poland, biuro@led-europe.pl
- Documents confirming compliance of products with applicable safety standards are available on the website www.v-tac.eu. If the required documentation is not available, please contact the local distributor: biuro@led-europe.pl
- If you have any problems with the product, contact the distributor in Poland: biuro@led-europe.pl
- Country of production: China