

INSTRUCTION MANUAL

LED Highbay

TECHNICAL DATA

MODEL	VT-92101	VT-92151	VT-92201
SKU	217808	217810, 217811	217812, 217813
WATTS	100W	150W	200W
LUMENS @SPHERE360°	13500 lm	20250 lm	27000 lm
INPUT VOLTAGE	AC: 220-240V, 50/60hz		
BEAM ANGLE	90°		
LIFE SPAN	25,000 Hours		
ON/OFF CYCLE	15,000 Times		
CRI	70		
PF	>0.9		
SAFETY CLASS	Class 1		
MATERIAL	Aluminium		
WIRE LENGTH	250mm		
IK RATING	IK06		
N.W (KGS)	0.79KGS/PC	1.2KGS/PC	1.4KGS/PC
MAX. MOUNTING HEIGHT	<5M	<5M	<5M
DIMENSION	Ø250x70.1mm	Ø295x70.1mm	Ø320x70.1mm



*This product contains a light source of energy efficiency class <C>, where <C> shall be replaced by the energy class of the contained light source.

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.


WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
4. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
5. Proper grounding should be ensured throughout the installation.
6. Terminal block not included.
7. To be connected with waterproof cable hose.
8. Replace any cracked protective shield.
9. Minimum distance from lighted objects 1m. 
10. For outdoor use only.

**IP65
RATING**

**05
YEAR
WARRANTY***

Lumen efficiency
**135
LUMENS/W**




MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.








This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

INSTALLATION DIAGRAM

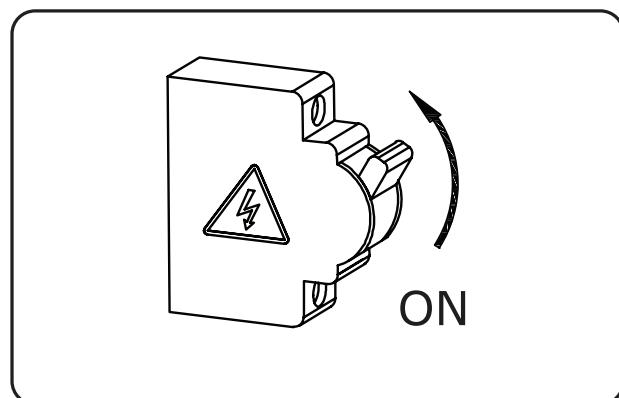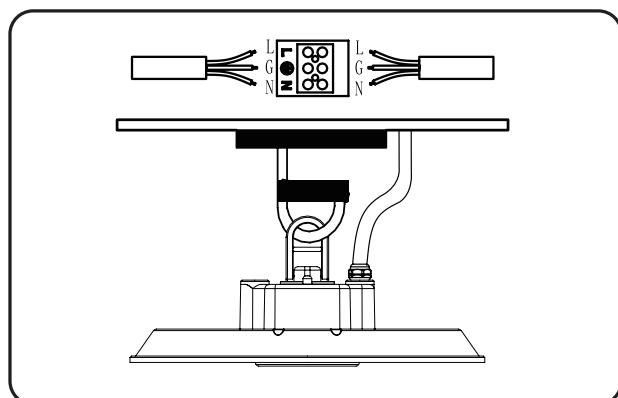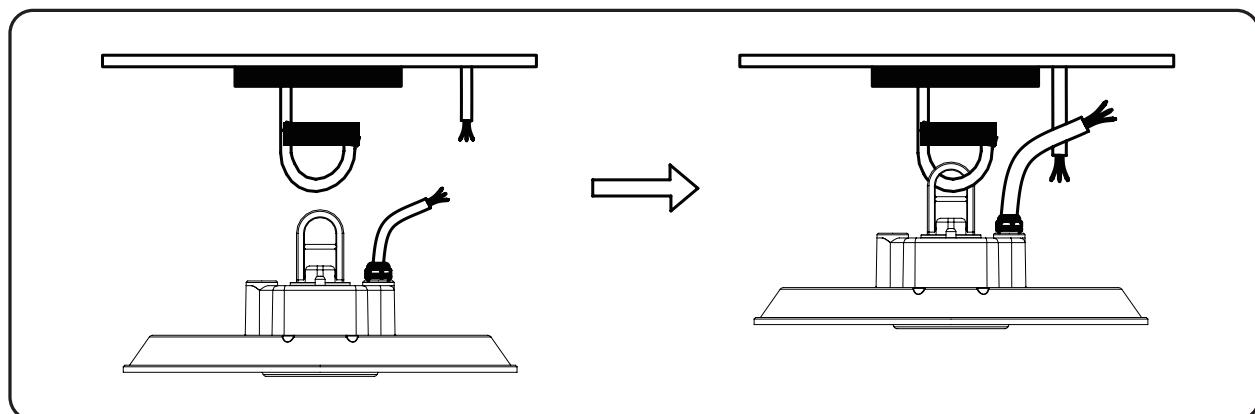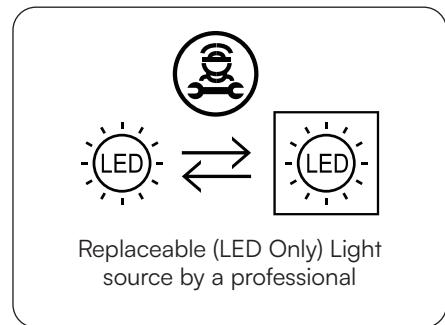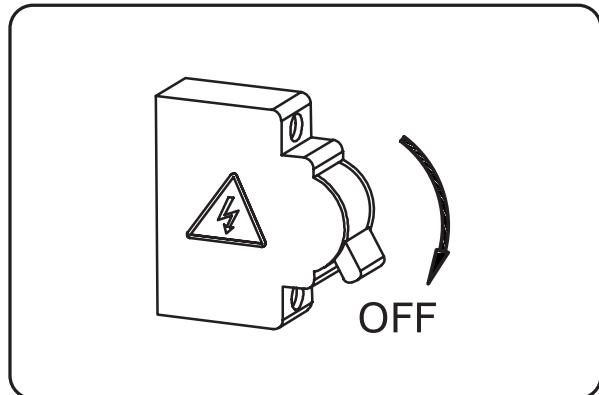

INSTALLATION INSTRUCTION

1. Step 1: Switch OFF the power
2. Step 2: Hang the lamp on a hook
3. Step 3: Connect L, N and G Wires
4. Step 4: Switch ON the power and test





NOTE

- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arms> reach.
- In order to maintain the IP protection of the product, the cable entry/gland should be installed on the bottom side.

DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

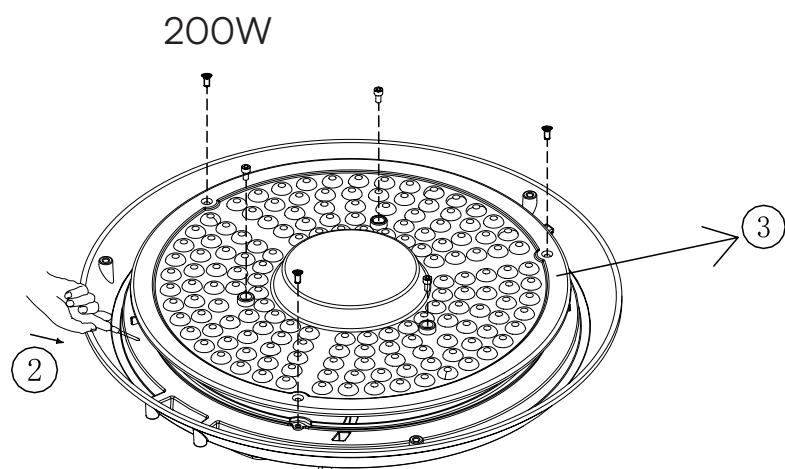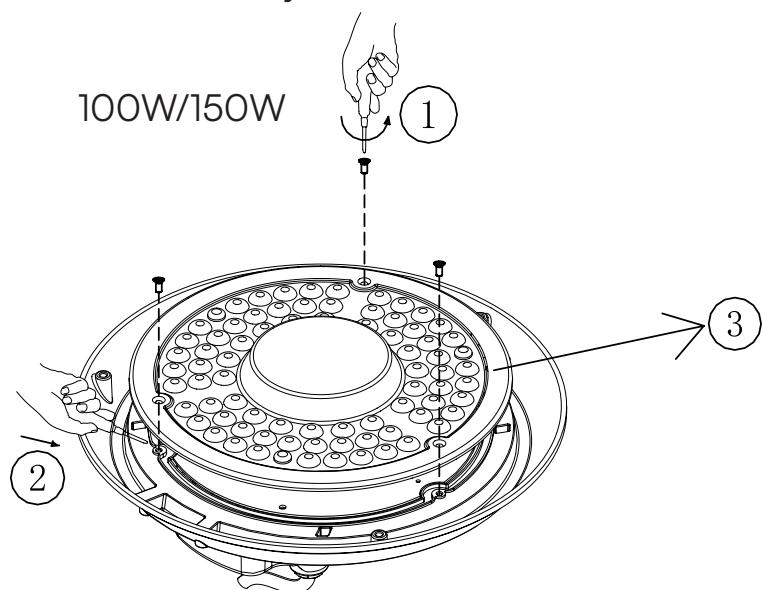

Note: Light source removal will void the warranty

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

VTAC EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

