



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

GARDEN SPIKE FOR SOLAR WALL LIGHT


TECHNICAL DATA

MODEL	VT-12050
SKU	24093-Back Body 24094-Corten Body 24095- Dark Grey
DIMENSION	97x32x274mm
BODY TYPE	Aluminium



INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.



In case of any query/issue with the product, please reach out to us at: support@v-tac.eu

For More products range, inquiry please contact our distributor or nearest dealers.

V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B





WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation should be done by certified electrician.



This marking indicates that this product should not be disposed of with other household wastes.

INSTALLATION DIAGRAM

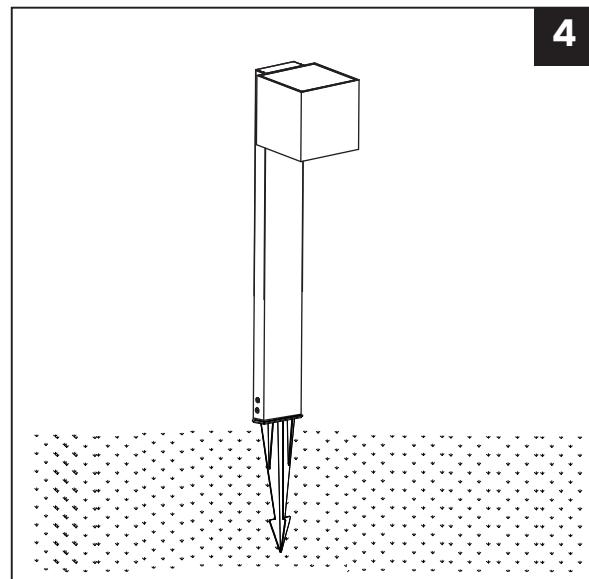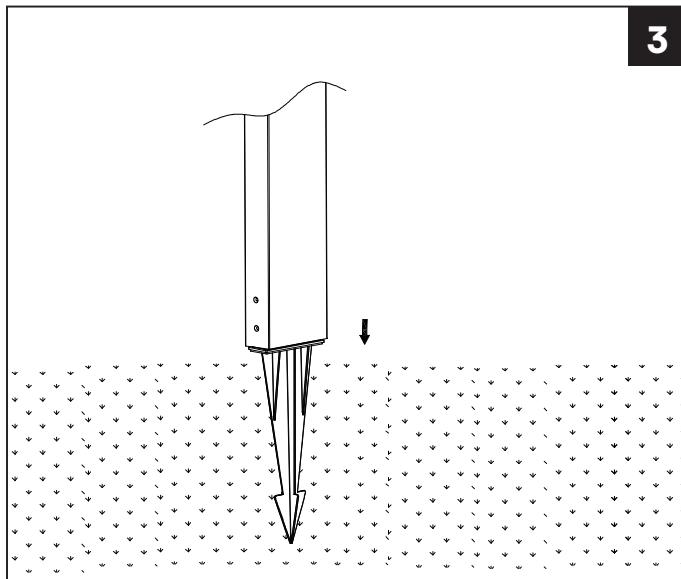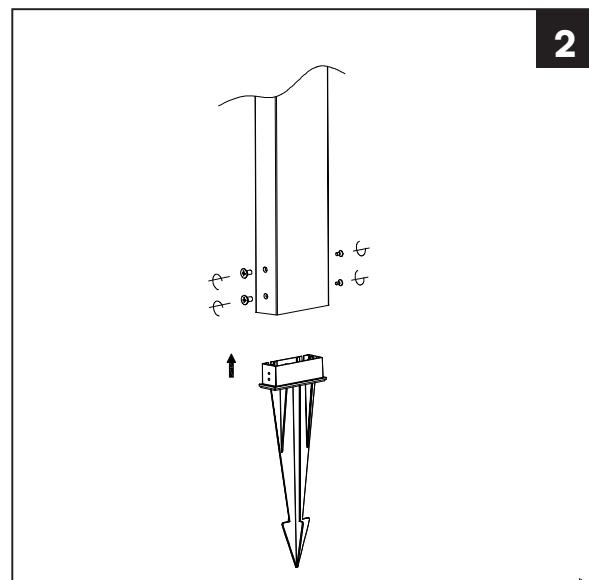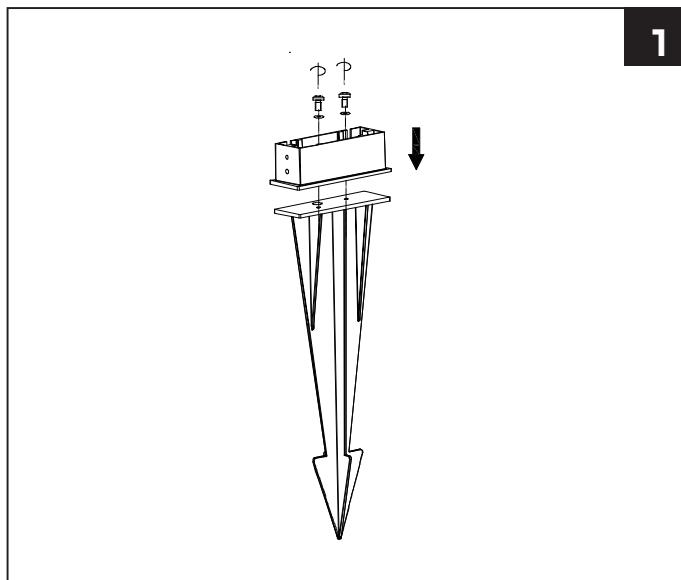

INSTALLATION INSTRUCTION

1. Open the installation base plate and put on the installation base plate of the solar wall light.
2. Attach the base plate, Secure the base plate and the pole to the spike using the provide screw and washer.
3. Put the spike into the lawn.
4. Slide the device up and down to fits securely onto the base plate.
5. Adjust the Sensor detection angle. Modify the angle according to your needs.
6. Power on and test the device.



PACKAGE CONTENTS

