



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL


LED PRISMATIC FITTING



TECHNICAL DATA


MODEL	VT-8310CCT	VT-8320CCT	VT-8340CCT	VT-8350CCT
SKU	24213	24218	23680	23681
WATTS	10W	20W	40W	50W
DF	>0.7	>0.7	>0.9	>0.9
BODY TYPE	Plastic			
CRI	>80			
BEAM ANGLE	120°			
LIFE SPAN	25,000 Hours			
ON/OFF CYCLE	>15,000 Times			
IP RATING	IP20			
IK RATING	IK06			
INPUT VOLTAGE	AC:220~240V, 50Hz			
OPERATING TEMPERATURE	-20°C to +40°C			
OPERATING HUMIDITY	10%~95%			
LUMENS @SPHERE 360°	1200 Lm	2400 Lm	4800	6000
NET WEIGHT	225±5g	225±5g	365±5g	450±5g

DIMENSIONS	D1(mm)	D2(mm)	L1(mm)
10W	24±1	76±1	300±2
20W	24±1	76±1	566±2
40W	26±1	76±1	1166±2
50W	26±1	76±1	1466±2

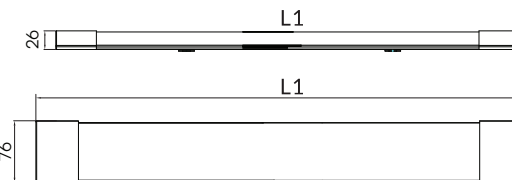


INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 3 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

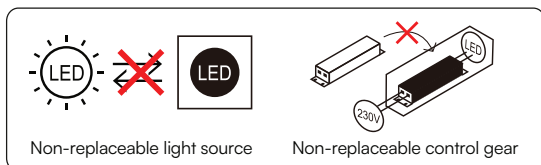

03 YEAR
WARRANTY*



**MULTI-LANGUAGE
MANUAL QR CODE**

Please scan the QR code
to access the manual in
multiple languages.

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
4. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
5. For Indoor use only
6. Inspect the product and accessories for damage prior to installation.
7. Maintain at least 0.2m clearance from flammable materials; avoid installing on ceilings or heat-emitting surfaces; separate low and high voltage wiring.
8. Ensure power cords are long enough, free from kinks, and routed separately from other cables.

Note: Replace cable spec" H03VVH2-F 2X0.75mm² ", should be replaced by a qualified technician.



Caution, risk of electric shock.



This marking indicates that this product should not be disposed of with other household wastes.

Class II Standard









INSTALLATION INSTRUCTIONS

1. Ensure the power supply is switched off before beginning installation.
2. Select an appropriate mounting location, drill two holes, and insert screws ensuring a minimum spacing of 50mm and less than the bracket length.
3. Align the shrapnel with the drilled holes and secure with screws; for luminaires 1.5m and longer, use three mounting buckles as appropriate. Ensure all brackets are level to maintain optimal product performance.
4. Ensure all installation brackets are aligned horizontally to maintain optimal product performance and structural integrity.
5. Connect the wires as per the diagram provided.
6. Use the button located at one end of the lamp to select the desired colour temperature: 3000K, 4000K, or 6500K.
7. Firmly press the lamp body into the mounting buckles to secure it, then slide it along the buckles to adjust positioning as needed.
8. Turn on the power and test the lamp.



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

INSTALLATION DIAGRAM

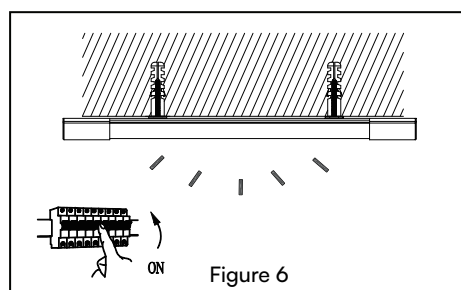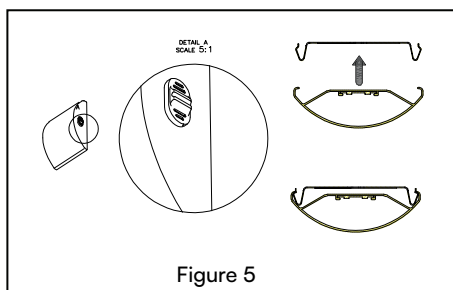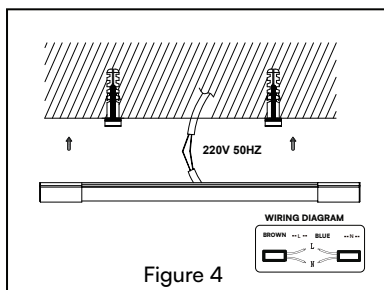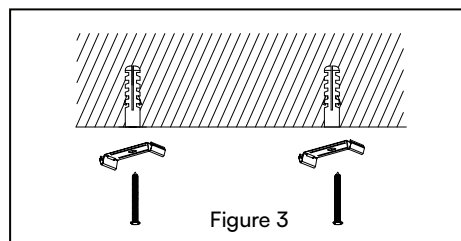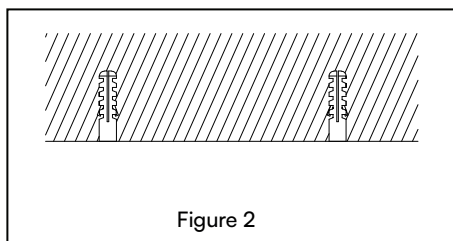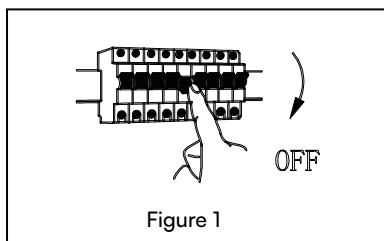

RoHS



UK
CA



V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND D02 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX