



Meaningful Innovation.

10kW

Three Phase Hybrid Solar Inverter

05 YEAR
WARRANTY



Colorful touch LCD, IP65 protection degree

240

Max. charging/discharging current of 240A



DC couple and AC couple to retrofit existing solar system

6


6 time periods for battery charging/discharging

10

Max. 10pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel



Support storing energy from diesel generator

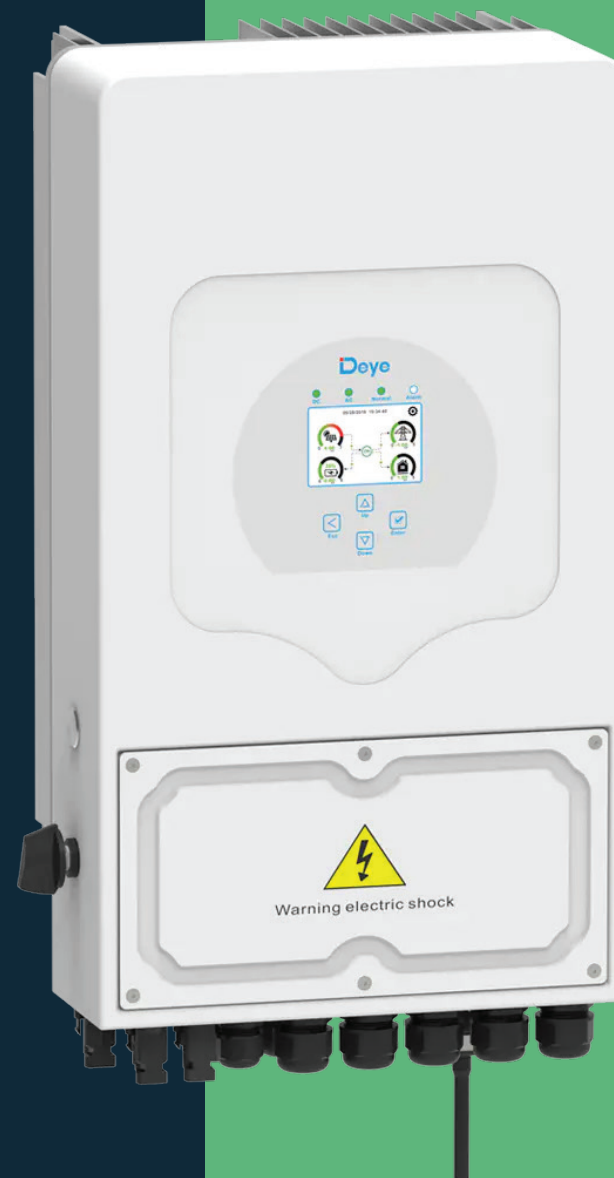

V-TAC.EU



LED-EUROPE.PL



CE RoHS

LISTING DETAILS

SKU Code: **11542**

EAN Code: **3800157697217**

MASTER BOX PACKAGING

Net Weight : **33.6kg**

Product Size : **422W x 699.3H x 279D**

EFFICIENCY

Max. Efficiency **97.60%**

Euro Efficiency **97.00%**

MPPT Efficiency **99.90%**

GENERAL DATA

Operating Temperature Range (°C) **-40~60°C, >45°C derating**

Cooling **Smart cooling**

Noise (dB) **<45 dB**

Communication with BMS **RS485; CAN**

Protection Degree **IP65**

Installation Style **Wall-mounted**

PV STRING INPUT DATA

Max. DC Input Power (W) **13000**

Rated PV Input Voltage (V) **550V(160V~800V)**

Start-up Voltage (V) **160V**

MPPT Voltage Range (V) **200V-650V**

Full Load DC Voltage Range (V) **350V-650V**

PV Input Current (A) **26+13**

Max. PV ISC (A) **34+17**

No.of MPP Trackers **2**

No.of Strings per MPP Tracker **2+1**

AC OUTPUT DATA

Rated AC Output and UPS Power (W) **10000**

Max. AC Output Power (W) **11000**

AC Output Rated Current (A) **15.2/14.5**

Max. AC Current (A) **22.7/21.7**

Max. Continuous AC Passthrough (A) **40A**

Peak Power (off grid) **2 time of rated power, 10 S**

Power Factor **0.8 leading to 0.8 lagging**

Grid Type **Three Phase**

DC injection current (mA) **THD<3% (Linear load<1.5%)**

Output Frequency and Voltage **50/60Hz; 3L/N/PE 220/380, 230/400Vac**

BATTERY INPUT DATA

Battery Type **Lead-acid or Li-Ion**

Battery Voltage Range (V) **40~60**

Max. Charging Current (A) **210A**

Max. Discharging Current (A) **210A**

External Temperature Sensor **Yes**

Charging Curve **3 Stages / Equalization**

Charging Strategy for Li-Ion Battery **Self-adaption to BMS**

PROTECTION

Integrated **PV Input Lightning Protection, Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge protection**

Output Over Voltage Protection **DC Type II/AC Type III**

CERTIFICATIONS AND STANDARDS

Grid Regulation **VDE4105, IEC61727/62116, VDE0126, AS4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150**

Safety EMC / Standard **IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2**