


V-TAC

Meaningful Innovation.

LED EUROPE.PL

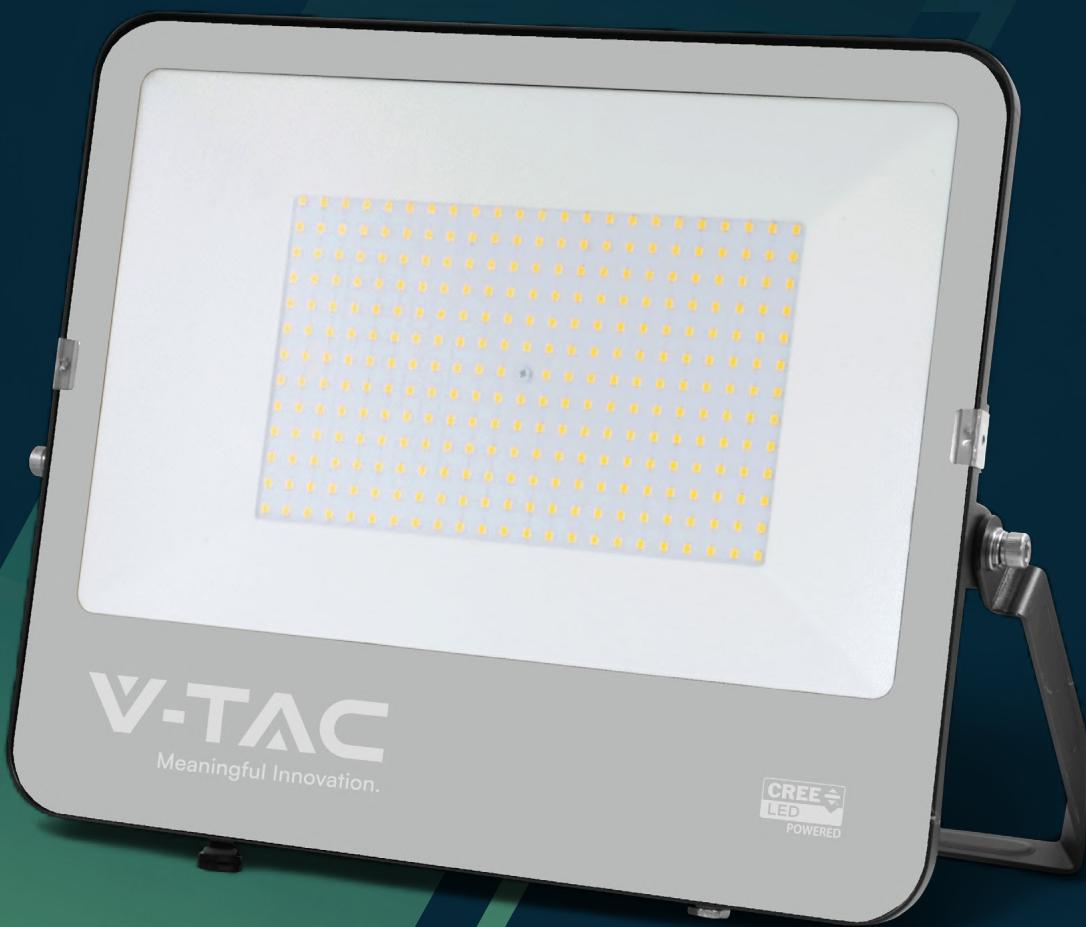

CATALOGUE



CORE RANGE | 2025



GLOBAL YET LOCAL



V-TAC was founded with the vision of providing energy-efficient LED lighting solutions worldwide.

While building a vast portfolio in LED lighting over the past years, we were also able to build expertise in innovation and expand our R&D team to offer a diversified catalogue with over 5000 products to our clients and partners all over the UK and Europe.

Utilizing our brand value and manufacturing technologies, we have been expanding our product categories beyond lighting, with one mission to improve the lives of humanity worldwide.

Now, we are moving towards promoting sustainable practices that will help citizens and businesses lower their carbon footprint, and become a global leader in providing energy efficient systems — including solar panels, inverters, battery packs, and power stations.



Creator for the everyman

Innovation for everyone.

Our purpose is to make the world a brighter place for all. We act on it by providing innovative and efficient solutions at value-pricing to make them accessible to the everyman.

Through our value pricing strategy, we bring efficient and sustainable products to every home, workplace and industry.

OUR JOURNEY SO FAR

V-TAC

Meaningful Innovation.

V-TAC was founded with the vision of providing energy-efficient LED lighting solutions worldwide



2009

2011



Began our EU expansion by opening the first V-TAC warehouse and office in Sofia, Bulgaria



LED Floodlights

V-TAC's LED floodlights are manufactured with industry-leading components to deliver exceptional performance, making them the perfect choice for efficient outdoor lighting. Each unit is designed and constructed of die-cast aluminum for maximum durability. With the IP65 rating, all the floodlights in this series are also water- and dust-proof.

Key Features

- IP65 rating — high-quality components to ensure waterproof/airtight performance
- Modern and strong Die cast aluminium body with a minimalist design, for high-end support and design
- Select units include a 1 meter wire for easy and convenient installation

LED FLOODLIGHTS - SLIMLINE SERIES - CREE

Main features

- Aluminium body
- 115° beam angle
- 30,000 hrs lifespan
- 6 Years Warranty
- CRI: >70
- SMD-CREE Chip
- AC:220-240V,50Hz
- IP65 Rating



SKU	Model	Watts	Lumens	Size
231996 3000K WARM WHITE 232166 4000K DAY WHITE 232176 6500K WHITE	VT-4455	50W	5740	185x35x162mm
232006 3000K WARM WHITE 232186 4000K DAY WHITE 232196 6500K WHITE	VT-44101	100W	11480	256x42x229mm
232206 4000K DAY WHITE 232216 6500K WHITE	VT-44201	200W	22960	406x47x333mm
238256 4000K DAY WHITE 232036 6500K WHITE	VT-44003	300W	34440	498x48x411.6mm

LED FLOODLIGHTS - CCT 3IN1 SERIES CREE

Main features

- Aluminium body
- 90° beam angle
- 50,000 hrs lifespan
- 6 Years Warranty
- CRI: >80
- SMD-CREE Chip
- AC:220-240V,50/60Hz
- IP65 Rating



SKU	Model	Watts	Lumens	Size
240726 3IN1	VT-44014CCT	10W	730	122x147x33mm

240736 | 3IN1 VT-44058CCT 50W 4000 182x227x33mm

240716 3IN1	VT-44110CCT	100W	8150	242x297x33mm
---------------	-------------	------	------	--------------

240706 | 3IN1 VT-44209CCT 200W 16450 326x410x33mm

LED FLOODLIGHTS - SLIMLINE E SERIES

Main features

- Aluminium body
- 110° beam angle
- 25,000 hrs lifespan
- 2 Years Warranty
- CRI: >80
- PF>0.9
- AC:220-240V,50/60Hz
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
23972 4000K DAY WHITE 23974 6500K WHITE	VT-44012	10W	850	60 pcs	96x25x90mm
23984 4000K DAY WHITE 23986 6500K WHITE	VT-44022	20W	1760	60 pcs	116x25x106mm
23993 3000K WARM WHITE 23994 6500K WHITE	VT-44037	30W	3000		143x25x122mm
23995 3000K WARM WHITE 23988 4000K DAY WHITE 23990 6500K WHITE	VT-44054	50W	4700	40 pcs	176x25x152mm
23992 3000K WARM WHITE 23980 4000K DAY WHITE 23982 6500K WHITE	VT-44109	100W	9500	10 pcs	253x29x225mm
23991 3000K WARM WHITE 23976 4000K DAY WHITE 23977 6500K WHITE	VT-44208	200W	19200	5 pcs	375x30x310mm

LED FLOODLIGHTS - FAST CONNECTOR-SENSOR

High quality Fast Connector Floodlight. Designed with high efficiency LED SMD Chips, delivering over 120 lumens per watt. Built with Fast connector for easy installation. Detects motion within a radius of 3 to 8 Meter. Installing Height 1.8 Meter to 2.5 Meter. PIR Sensor featuring - Manual Override Function; can be switched between sensor mode & constant lighting mode. Built Strong and durable with Die Cast Aluminium - Corrosion resistant design. Perfectly built for outdoor with Ingress protection of IP65. Application - Facade lighting, lobby, garage, passage, parking lot and many more.

Main features

- AC:220-240V,50/60Hz
- Body Type: Aluminium
- 120° Beam Angle
- CRI >70
- PF >0.7
- 25,000 hr lifespan
- 0-100% in <1sec
- Sensor Type: PIR
- Time Delay: Min 7sec+2sec Max 7min+2min
- Detection Range: 120°±20°
- Detection Distance: 3-8m (Radius)
- IP65 Rating
- SMD
- 2 Years Warranty



SKU	Model	Watts	Lumens	Box Qty	Size
23838 3000K WARM WHITE 23839 4000K DAY WHITE 23840 6500K WHITE	VT-4409-FC-S	10W	1200	20 pcs	152.5x89.1x182.8mm
23841 3000K WARM WHITE 23842 4000K DAY WHITE 23843 6500K WHITE	VT-4419-FC-S	20W	2400	20 pcs	152.5x89.1x182.8mm
23844 3000K WARM WHITE 23845 4000K DAY WHITE 23846 6500K WHITE	VT-4429-FC-S	30W	3600	20 pcs	184.5x89.1x224.3mm
23847 3000K WARM WHITE 23848 4000K DAY WHITE 23849 6500K WHITE	VT-4449-FC-S	50W	6000	20 pcs	217.3x89.1x241.9mm

HIGH LUMEN EVOLUTION SERIES

The V-TAC High Lumen Evolution Series features cutting-edge SMD LED Chips, delivering over 185 lumens per watt. With a high-performance driver, it ranges from 30W to 200W and is built with IP65-rated construction for durability. This series provides a reliable lighting solution, backed by a 2-year warranty.

NEW


Main features

- IP65 Rating.
- SMD
- 2 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- CRI >70
- PF>0.9
- 25,000 hr lifespan
- 0-100% in <1sec


**EVOLUTION
SERIES**


**IP65
RATING**


**02
YEAR
WARRANTY**


**EFFICIENCY
185
LUMENS/W**



SKU	Model	Watts	Lumens	Box Qty	Size
9892-5 4000K DAY WHITE 9893-5 6500K WHITE	VT-4456	50W	9250	10 pcs	183.5x34x169mm
9894-5 4000K DAY WHITE 9895-5 6500K WHITE	VT-44105	100W	18500	4 pcs	253.5x40x242.5mm
9896-5 4000K DAY WHITE 9897-5 6500K WHITE	VT-44205	200W	37000	2 pcs	402.5x44x349.5mm

FLOODLIGHT CCT 3IN1

The CCT 3-in-1 Floodlights offer versatile lighting with a toggle switch for selecting 3000K, 4000K, or 6500K color temperatures. Available in 30W, 50W, and 100W, they feature a stylish design and a robust IP65 rating for durability. With a 110-degree beam angle and backed by a 2-year warranty, these floodlights combine style and reliability.

Main features

- Aluminium body
- 110°beam angle
- 20,000 hrs lifespan
- 2 Years Warranty
- CRI: >80
- PF: >0.9
- AC:220-240V,50/60Hz
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
23769 3IN1	VT-44036CCT	30W	3000	20 pcs	158x38x159mm
23768 3IN1	VT-44056CCT	50W	5000	20 pcs	193x38x205mm
23767 3IN1	VT-44107CCT	100W	10000	10 pcs	273x38x241mm

SLIM STREETLIGHTS


Introducing slim and sleek LED Streetlights from V-TAC — experience consistent illumination. Powerful LED light source with high lumen efficiency and dedicated IP65 sealed optical cavities. Uniform light distribution maximizes efficiency, suitable for streets, industrial facilities, cross roads etc

Main features

- Aluminium body
- 110°beam angle
- 25,000 hrs lifespan
- 2 Years Warranty
- CRI: >70
- PF: >0.9
- AC:220-240V,50/60Hz
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
10206 4000K DAY WHITE 10207 6500K WHITE	VT-15035ST	30W	2510	30 pcs	266x129x37mm
10208 4000K DAY WHITE 10209 6500K WHITE	VT-15057ST	50W	4270	24 pcs	306x150x37mm
10210 4000K DAY WHITE 10211 6500K WHITE	VT-15110ST	100W	8700	12 pcs	437x200x40mm

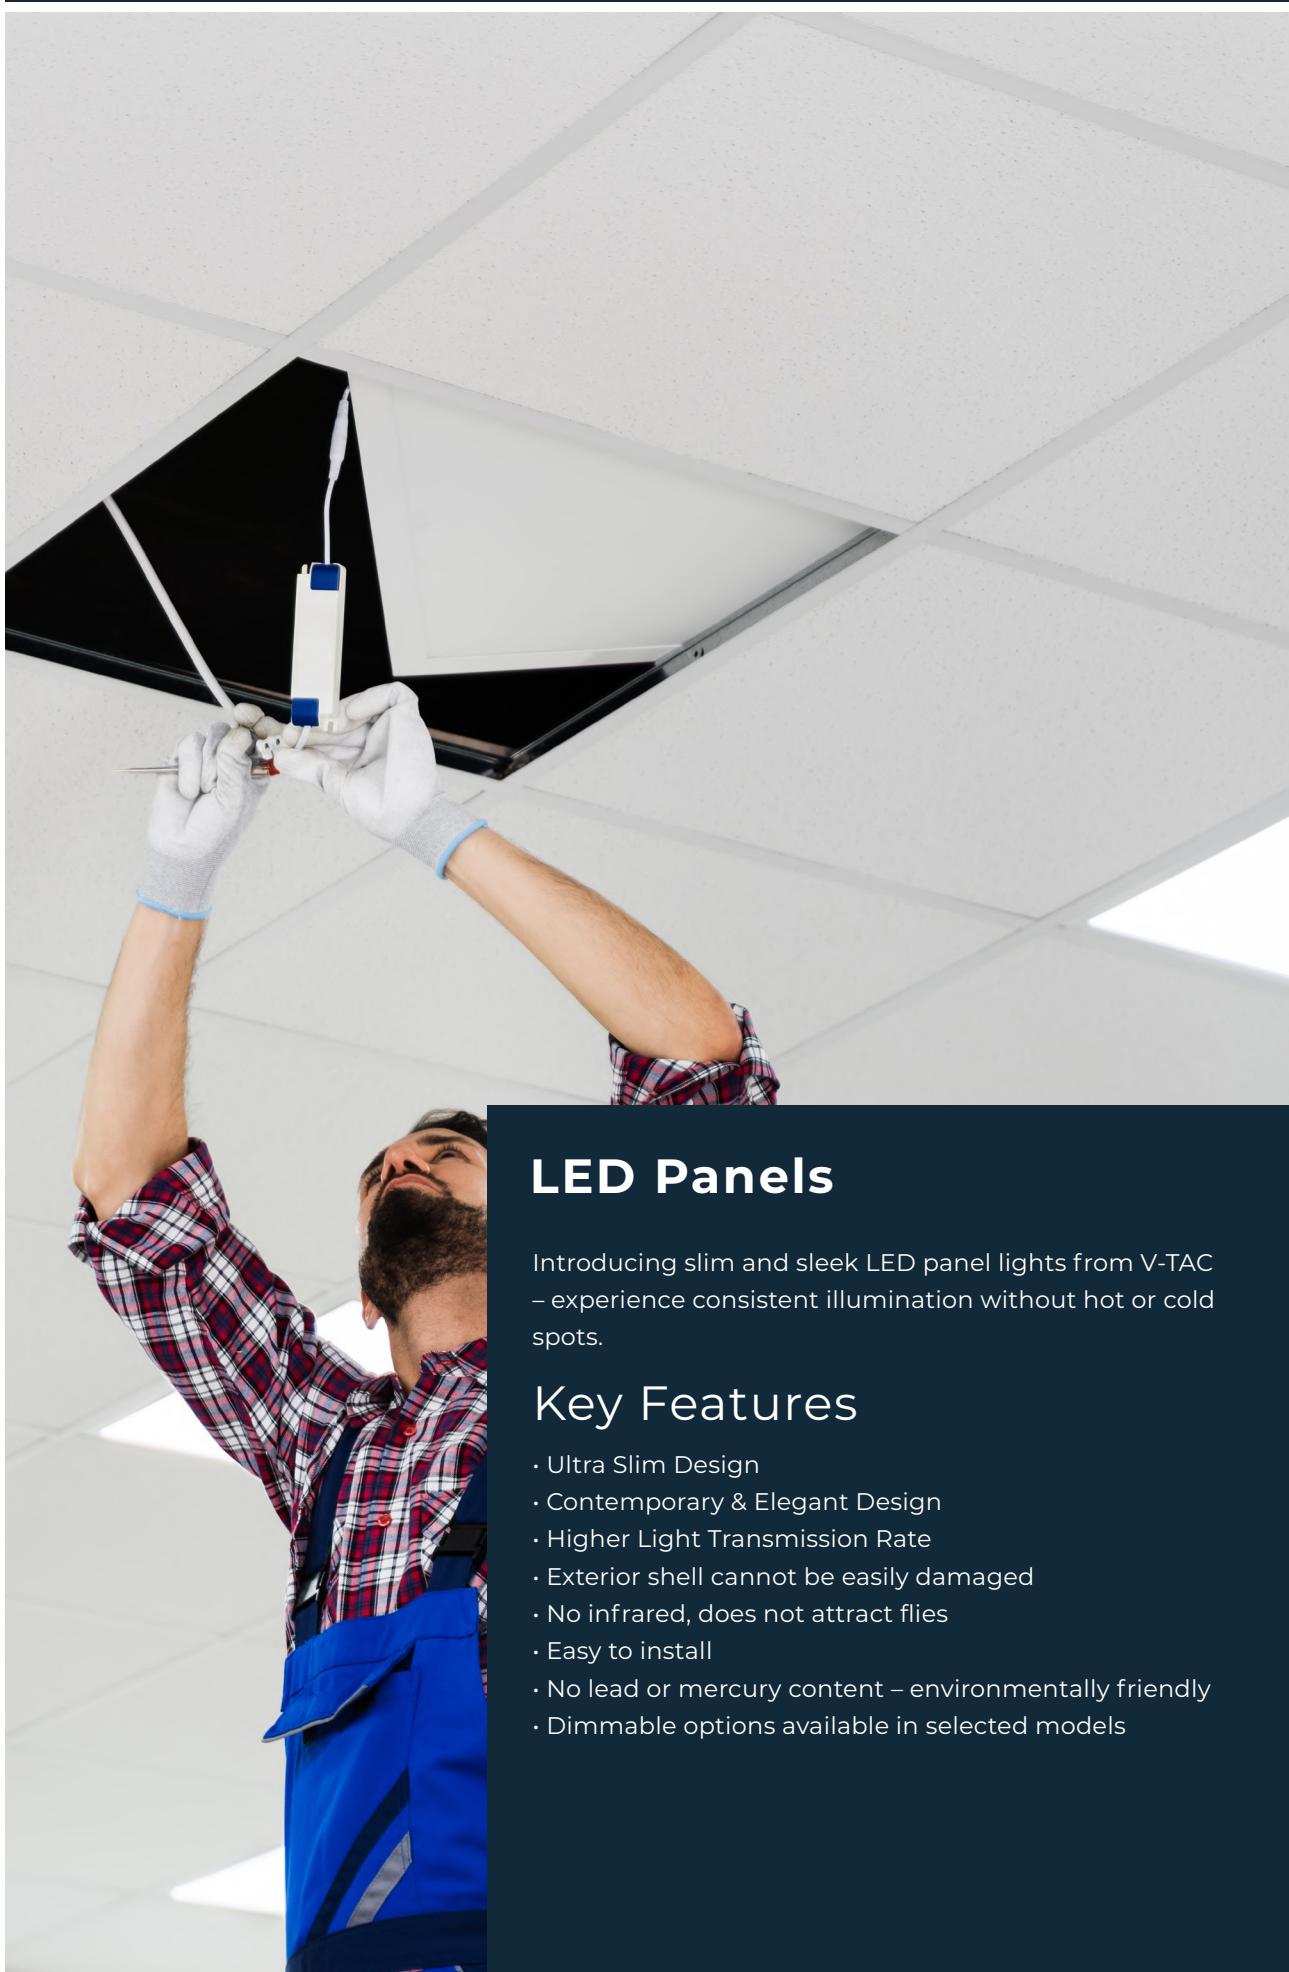

LED Panels

Introducing slim and sleek LED panel lights from V-TAC – experience consistent illumination without hot or cold spots.

Key Features


- Ultra Slim Design
- Contemporary & Elegant Design
- Higher Light Transmission Rate
- Exterior shell cannot be easily damaged
- No infrared, does not attract flies
- Easy to install
- No lead or mercury content – environmentally friendly
- Dimmable options available in selected models

HIGH LUMEN 2IN1 LED BACKLIT PANEL | 60X60



Main features

- 110° Beam Angle
- PF: >0.9
- CRI: >80
- 30,000 hr lifespan
- AC:220-240V,50/60Hz
- IP20
- ABS+PP+Iron Body



The HIGH LUMEN LED Backlit Panel delivers over 120 lm/W with advanced SMD chips, offering both efficiency and durability. Its flicker-free output ensures consistent, comfortable lighting, making it ideal for offices, conference rooms, showrooms, and other indoor applications.


SKU	Model	Watts	Lumens	Box Qty	Size
23765 4000K DAY WHITE	VT-61037	36W	4320	10 pcs	595x595x33.5mm

HIGH LUMEN LED BACKLIT PANEL | 5 YEAR WARRANTY



Main features

- 110° Beam Angle
- PF: >0.9
- CRI: >80
- 30,000 hr lifespan
- AC:220-240V,50/60Hz
- IP40



The HIGH LUMEN LED Backlit Panel delivers 120 lm/W with advanced SMD chips in a compact 620x620 mm design. With UGR <19, and flicker-free Lifud driver make it perfect for offices, conference rooms, and showrooms. Backed by a 5-year warranty for reliable indoor performance.


SKU	Model	Watts	Lumens	Box Qty	Size
23667 4000K DAY WHITE	VT-6234	36W	4320	6 pcs	620x620x34mm

HIGH LUMEN LED BACKLIT PANEL | 5 YEAR WARRANTY



Main features

- 110° Beam Angle
- PF: >0.9
- CRI: >80
- 30,000 hr lifespan
- AC:220-240V,50/60Hz
- IP20
- Body



The LED Panel features a powerful light source with a lumen efficiency of 120 lm/W, fitted with high-efficiency SMD LED chips and a reliable Philips driver. Designed for easy installation, it comes with a quick-connect driver, backed by a 5-year warranty. Offering bright and efficient illumination, it is ideal for offices, conference rooms, showrooms, lobbies, cabins, kitchens, and other indoor spaces.

SKU	Model	Watts	Lumens	Box Qty	Size
23822 4000K DAY WHITE	VT-61040	40W	4800	10 pcs	595x595x33mm
23823 6500K WHITE					

SURFACE MOUNTING -60X60



SURFACE MOUNTING -60X60



SKU	Size(mm)	Box Qty
8156	600x600mm	10 pcs


SKU	Size(mm)	Box Qty
11449	600x600x43mm	12 pcs

LED BIG BACKLIT PANEL | 2 YEAR WARRANTY

The V-TAC LED 120x30 Panel is an efficient lighting solution, delivering over 120 Lumen per Watt with advanced SMD Chips., while its sturdy construction and 5-year warranty ensure reliability. Easy installation and lack of UV emissions make it a safe and convenient choice for indoor spaces

Main features

- 110° Beam Angle
- PF: >0.9
- CRI: >80
- 25,000 hr lifespan
- AC:220-240V, 50/60Hz
- IP20
- Aluminium+PMMA+PP Body



SKU	Model	Watts	Lumens	Box Qty	Size
23147 4000K DAY WHITE	VT-61140	40W	4800	6 pcs	1195x295x30mm

SURFACE MOUNTING -120X30



SKU	Size(mm)	Box Qty
8158	1200x300x55mm	10 pcs



LED Mini Panels

Experience consistent illumination and zero hot or cold spots, introducing slim and sleek LED Panel Lighting from V-TAC.

Key Features





- Ultra Slim Design
- Contemporary & Elegant Design
- Higher Light Transmission Rate
- Exterior shell cannot be easily damaged
- No infrared, does not attract flies
- Easy to install
- No lead or mercury content – environmentally friendly
- Dimmable options available in selected models

LED MINI BACKLIT RECESSED PANELS

The V-TAC LED Backlit Mini Panel is a compact and energy-efficient lighting solution. Equipped with efficient SMD LED chips that deliver over 110 lumens per watt, this panel offers bright illumination while consuming minimal energy. Its eco-friendly design contains no lead or mercury, making it a safe and sustainable choice. The high-quality power driver ensures a long and reliable lifespan, backed by a 2-year warranty. Ideal for indoor use.

Main features

- 120° Beam Angle
- PF: >0.9
- CRI: >80
- 20,000 hr lifespan
- AC:220-240V, 50/60Hz
- IP20
- Plastic Body






SKU	Model	Watts	Lumens	Box Qty	Size
7855 3000K WARM WHITE 7856 4000K DAY WHITE 7857 6500K WHITE	VT-61003RD	3W	330	100 pcs	90.5x28mm
7858 3000K WARM WHITE 7859 4000K DAY WHITE 7860 6500K WHITE	VT-61006RD	6W	660	80 pcs	120.5x28.4mm
7861 3000K WARM WHITE 7862 4000K DAY WHITE 7863 6500K WHITE	VT-61012RD	12W	1200	60 pcs	170.8x28.4mm
7864 3000K WARM WHITE 7865 4000K DAY WHITE 7866 6500K WHITE	VT-61018RD	18W	3000K - 1850 4000K - 1980 6500K - 1980	40 pcs	220.8x28.9mm
7867 3000K WARM WHITE 7868 4000K DAY WHITE 7869 6500K WHITE	VT-61024RD	24W	3000K - 2500 4000K - 2640 6500K - 2640	20 pcs	296x29.1mm

LED MINI BACKLIT RECESSED PANELS

The V-TAC LED Backlit Mini Panel is a compact and energy-efficient lighting solution. Equipped with efficient SMD LED chips that deliver over 110 lumens per watt, this panel offers bright illumination while consuming minimal energy. Its eco-friendly design contains no lead or mercury, making it a safe and sustainable choice. The high-quality power driver ensures a long and reliable lifespan, backed by a 2-year warranty. Ideal for indoor use.

Main features

- 120° Beam Angle
- PF: >0.9
- CRI: >80
- 20,000 hr lifespan
- AC:220-240V, 50/60Hz
- IP20
- Plastic Body





SKU	Model	Watts	Lumens	Box Qty	Size
10477 3000K WARM WHITE 10478 4000K DAY WHITE 10479 6500K WHITE	VT-61003SQ	3W	330	100 pcs	90.2x118x28.2mm
10480 3000K WARM WHITE 10481 4000K DAY WHITE 10482 6500K WHITE	VT-61006SQ	6W	660	100 pcs	120.5x120.5x28.2mm
10483 3000K WARM WHITE 10484 4000K DAY WHITE 10485 6500K WHITE	VT-61012SQ	12W	1200	60 pcs	170.8x199x28.4mm
10486 3000K WARM WHITE 10487 4000K DAY WHITE 10488 6500K WHITE	VT-61018SQ	18W	3000K - 1850 4000K - 1980 6500K - 1980	40 pcs	220.4x220.4x28.8mm
10489 3000K WARM WHITE 10490 4000K DAY WHITE 10491 6500K WHITE	VT-61024SQ	24W	3000K - 2500 4000K - 2640 6500K - 2640	20 pcs	295x295x28.6mm


LED MINI PANELS PREMIUM SERIES-ROUND

Main features

- 120° Beam Angle
- PF: >0.9
- CRI: >80
- 20,000 hr lifespan
- AC:85-265V, 50/60Hz
- IP20
- Plastic Body

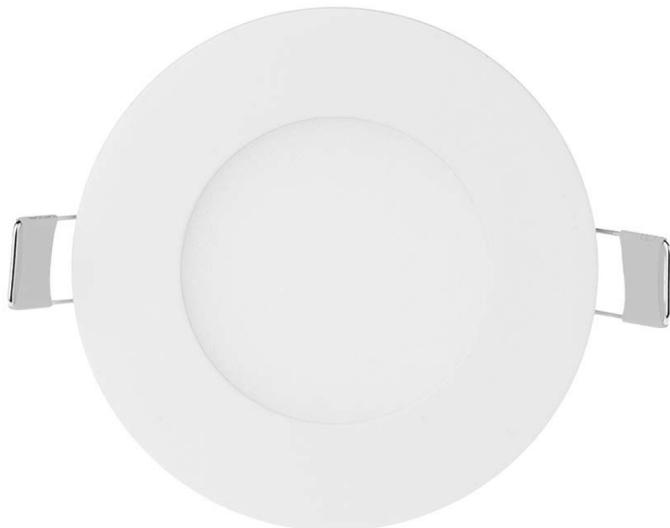

SKU	Model	Watts	Lumens	Box Qty	Size
216292 2700K WARM WHITE 216293 4000K DAY WHITE 216294 6400K WHITE	VT-307RD	3W	130	50 pcs	84x12mm
214854 2700K WARM WHITE 214855 4000K DAY WHITE 214856 6400K WHITE	VT-607RD	6W	490	40 pcs	120x12mm
214857 2700K WARM WHITE 214858 4000K DAY WHITE 214859 6400K WHITE	VT-1207RD	12W	1160	20 pcs	170x12mm
214860 2700K WARM WHITE 214861 4000K DAY WHITE 214862 6400K WHITE	VT-1807RD	18W	1400	20 pcs	225x12mm
214872 2700K WARM WHITE 214873 4000K DAY WHITE 214874 6400K WHITE	VT-2407RD	24W	2500	10 pcs	300x12mm

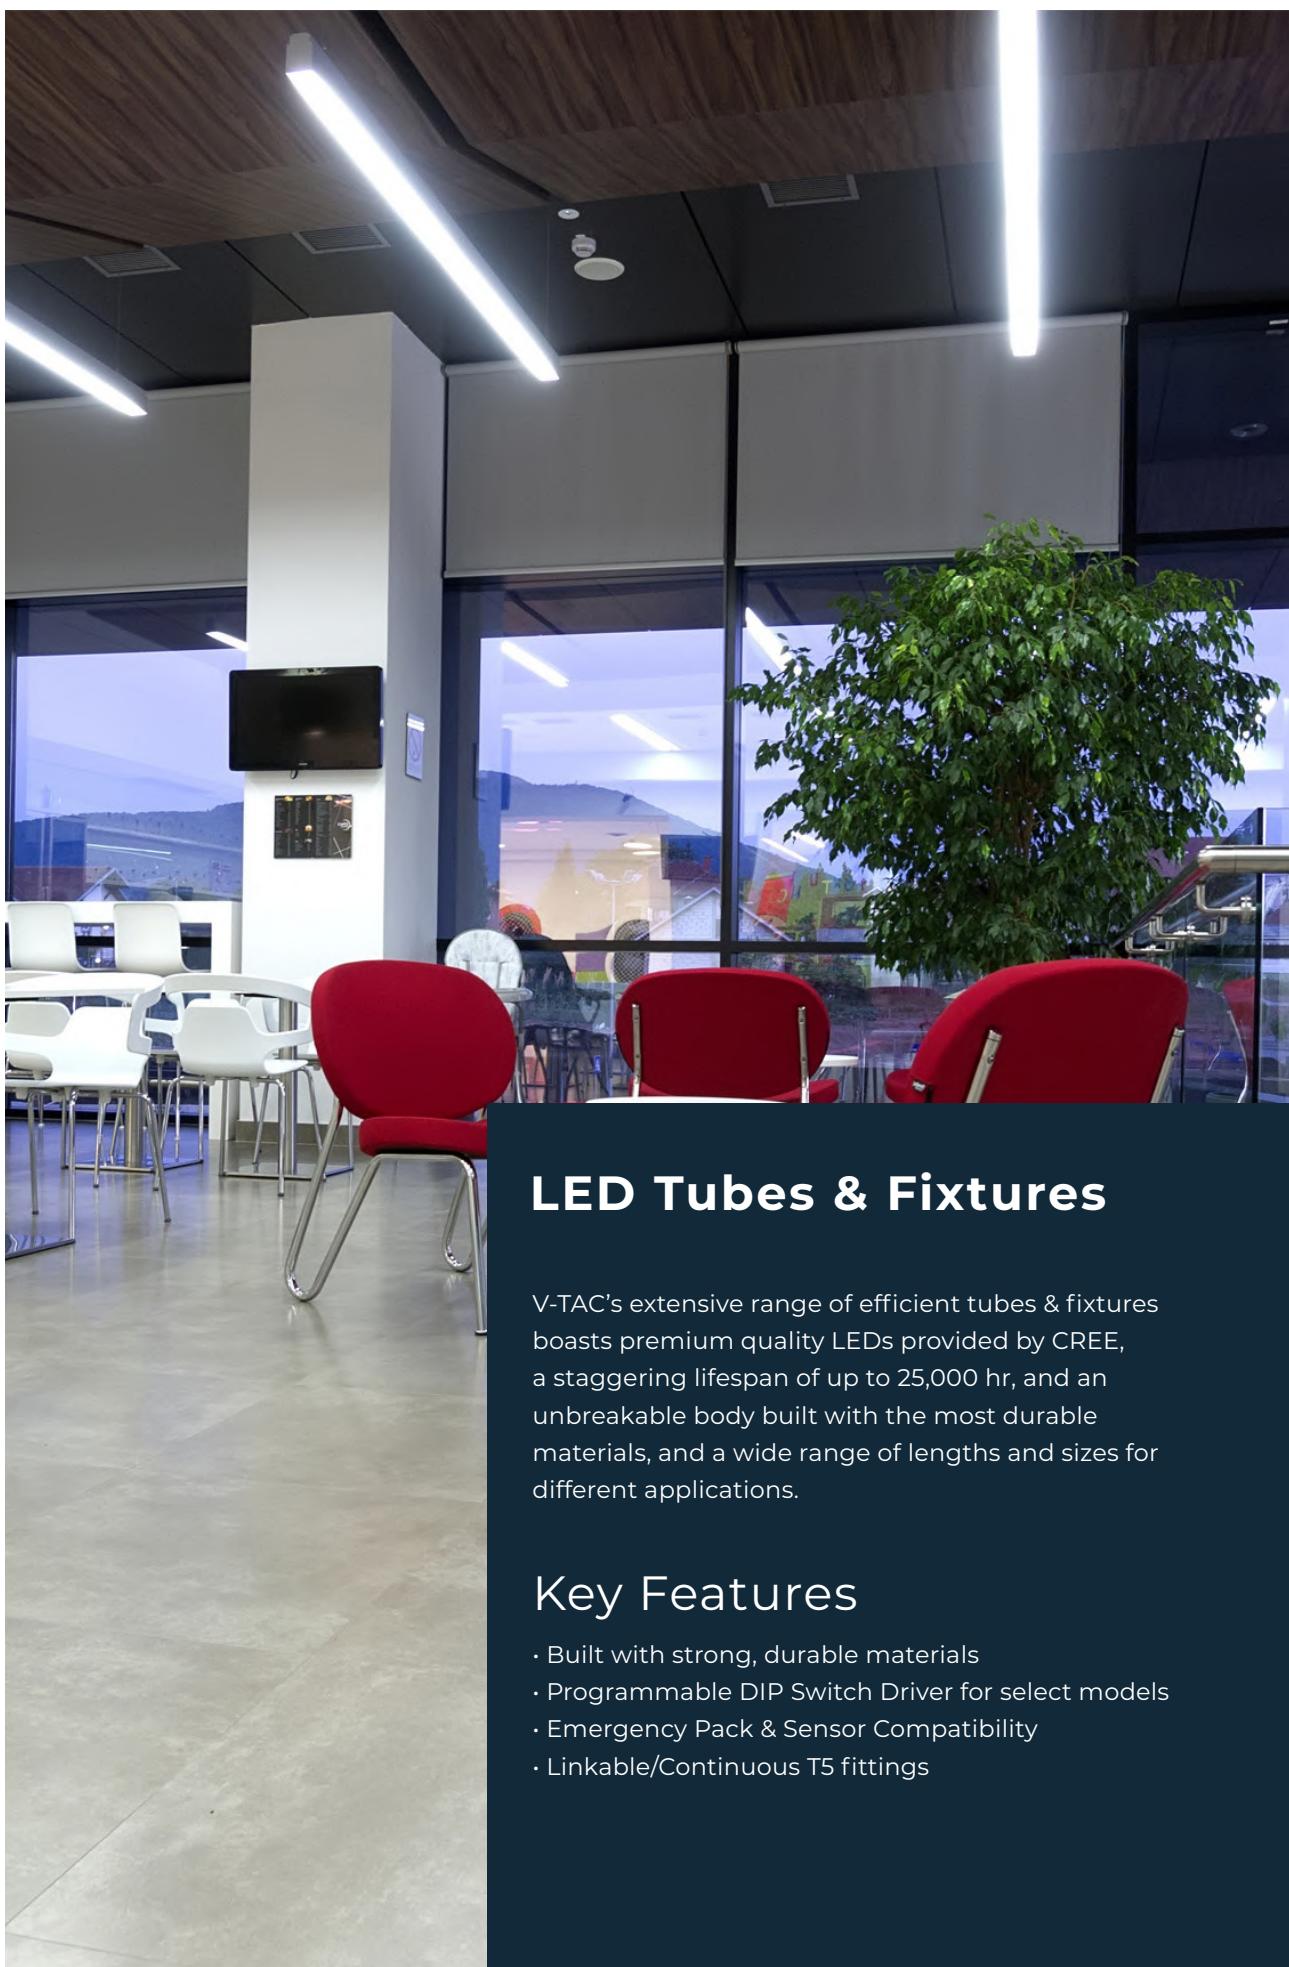

LED Tubes & Fixtures

V-TAC's extensive range of efficient tubes & fixtures boasts premium quality LEDs provided by CREE, a staggering lifespan of up to 25,000 hr, and an unbreakable body built with the most durable materials, and a wide range of lengths and sizes for different applications.

Key Features


- Built with strong, durable materials
- Programmable DIP Switch Driver for select models
- Emergency Pack & Sensor Compatibility
- Linkable/Continuous T5 fittings

LED NANO PLASTIC TUBES | G13 - T8



Main features

- Plastic Body
- 25,000 hr lifespan
- 160° Beam Angle
- 15000 On/Off
- AC:220-240V,50Hz
- CRI - >80
- >0.5 PF
- 3 Years Warranty





SKU	Model	Watts	Lumens	Box Qty	Size
23871 4000K DAY WHITE	VT-062	7.5W	850	25 pcs	600x28mm
23872 3000K WARM WHITE	VT-122	16.5W	1850	25 pcs	1200x28mm
23873 6500K WHITE					
23874 3000K WARM WHITE	VT-152	24W	3000	25 pcs	1500x28mm
23875 4000K DAY WHITE					
23876 6500K WHITE					

LED NANO PLASTIC TUBES ESSENTIAL SERIES| G13 - T8



Main features

- Plastic Body
- 25,000 hr lifespan
- 160° Beam Angle
- 15000 On/Off
- AC:220-240V,50Hz
- CRI - >80
- >0.5 PF
- 3 Years Warranty





SKU	Model	Watts	Lumens	Box Qty	Size
216392 3000K WARM WHITE	VT-6072	9W	850	25 pcs	600x28mm
216393 4000K DAY WHITE					
216394 6500K WHITE					
216272 4000K DAY WHITE	VT-9077	14W	1400	25 pcs	900x28mm
216262 6500K WHITE					
216263 3000K WARM WHITE	VT-1277	18W	1850	25 pcs	1200x28mm
216273 4000K DAY WHITE					
216264 6500K WHITE					
216265 3000K WARM WHITE	VT-1577	20W	2100	25 pcs	1500x28mm
216309 4000K DAY WHITE					
216310 6500K WHITE					

LED PRISMATIC FITTING CREE HIGH LUMEN

Main features

- 120° Beam Angle
- PF: >0.7
- CRI: >80
- 30,000 hr lifespan
- AC:220-240V, 50Hz
- IP20
- Plastic Body




SKU	Model	Watts	Lumens	Box Qty	Size
203446 3000K WARM WHITE	VT-8-10	10W	3000K - 1000 4000K - 1200 6500K - 1200	30 pcs	300x76x24mm
203456 4000K DAY WHITE					
203466 6500K WHITE					
203476 3000K WARM WHITE	VT-8-20	20W	3000K - 2050 4000K - 2400 6500K - 2400	30 pcs	566x76x24mm
203486 4000K DAY WHITE					
203496 6500K WHITE					
203506 3000K WARM WHITE	VT-8-40	40W	3000K - 4300 4000K - 4800 6500K - 4800	30 pcs	1166x76x24mm
203516 4000K DAY WHITE					
203526 6500K WHITE					
203546 4000K DAY WHITE	VT-8-50	50W	6000	30 pcs	1466x76x24mm
203556 6500K WHITE					

HIGH LUMEN LED GRILL FITTINGS

High Lumen LED Grill Fittings features 120 lm/W SMD Chips, offering efficiency and reliability with no flickering and no UV radiation. Available in multiple lengths and color temperatures, this DIY product comes with a 5-year warranty, ideal for indoor applications.

Main features

- 120° Beam Angle
- PF: >0.9
- CRI: >80
- 25,000 hr lifespan
- AC:220-240V, 50Hz
- IP20
- Plastic Body



SKU	Model	Watts	Lumens	Box Qty	Size
23783 3000K WARM WHITE 23784 4000K DAY WHITE 23785 6500K WHITE	VT-8310	10W	3000K - 1000 4000K - 1200 6500K - 1200	30 pcs	300x76x26mm
23786 4000K DAY WHITE 23787 6500K WHITE	VT-8320	20W	2400	30 pcs	566x76x26mm
23788 3000K WARM WHITE 8048 4000K DAY WHITE 8049 6500K WHITE	VT-8340	40W	3000K - 4300 4000K - 4800 6500K - 4800	30 pcs	1166x76x24mm
8050 4000K DAY WHITE 8054 6500K WHITE	VT-8350	50W	6000	30 pcs	1466x76x24mm

HIGH LUMEN CREE WATERPROOF FITTINGS | G SERIES

The PRO G-Series features 130 lm/W CREE Chips with a 0.7 power factor, offering efficiency and reliability. Linkable up to 16 units, it provides no flickering and comes in multiple lengths and color temperatures. This DIY product includes waterproof glands, a 6-year warranty, and is IP65 rated for exterior applications

Main features

- IP65 Rating
- SMD-CREE Chip
- 6 Years Warranty
- AC:220-240V,50/60Hz
- Body Type: PC
- IK05
- 120° Beam Angle
- CRI >80
- PF>0.7
- 50,000 hr lifespan
- On/Off Cycle >25000
- Linkable up to 16 units



SKU	Model	Watts	Lumens	Box Qty	Size
2162836 4000K DAY WHITE 2162826 6500K WHITE	VT-6076	18W	2410	12 pcs	600x66x58mm
2162856 4000K DAY WHITE 2162846 6500K WHITE	VT-1249	36W	4820	12 pcs	1200x66x58mm
2162876 4000K DAY WHITE 2162866 6500K WHITE	VT-1574	48W	6430	12 pcs	1500x66x58mm

LED ECONOMICAL WATERPROOF FITTINGS | G SERIES

The Economical G Series features 120 lm/W SMD Chips with a 0.7 power factor, offering efficiency and reliability. Linkable up to 16 units, it provides no flickering and comes in multiple lengths and color temperatures. This DIY product includes PG11 waterproof glands, a 2-year warranty, and is IP65 rated for exterior applications.

Main features

- IP65 Rating
- SMD Chip
- 2 Years Warranty
- AC:220-240V,50/60Hz
- Body Type: PC
- 120° Beam Angle
- CRI >80
- PF>0.7
- 25,000 hr lifespan
- On/Off Cycle >15000



SKU	Model	Watts	Lumens	Box Qty	Size
216283 4000K DAY WHITE 216282 6500K WHITE	VT-6076-N	18W	2160	12 pcs	600x66x58mm
216285 4500K DAY WHITE 216284 6400K WHITE	VT-1249-N	36W	4320	12 pcs	1200x65x58mm
216287 4500K DAY WHITE 216286 6400K WHITE	VT-1574-N	48W	5760	12 pcs	1500x65x58mm



LED Dome Lights

Create a better ambience in any environment with V-TAC's LED Dome Lights. These compact and easy to install lights make a perfect replacement for traditional dome lights.

Key Features

- flicker-free
- No UV radiation
- Easy installation
- Premium quality LED chip
- Premium quality power driver
- Instant start 0–100% in 0.01 seconds
- Extreme weather toleration (-20°C to +45°C)

LED DOME LIGHT SENSOR CREE SERIES

**Main features**

- IP20 Rating
- SMD-CREE Chip
- 6 Years Warranty
- AC:220-240V,50/60Hz
- 120° Beam Angle
- CRI>80
- 360 Detection Range
- 6M Max(<24C) Detection Distance
- Min. 10sec±3sec, Max. 3min±30sec Time Delay
- <3-2000lux(adjustable) Ambient Light
- 0.6-1.5m/s Detection Motion Speed




SKU	Model	Watts	Lumens	Size
218086 4000K DAY WHITE	VT-13	12W	1000	290x59.5mm

REFLECTOR SERIES-TILTABLE



Main features

- IP20 Rating
- SMD Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Plastic
- 38° Beam Angle
- Recessed Installation
- Round
- 20,000 hr lifespan
- On/Off Cycle >15000




SKU	Model	Watts	Lumens	Box Qty	Size
23837 3IN1	VT-2707CCT	7W	510	100 pcs	88x45mm

DOME SENSOR - E27 HOLDER



Main features

- 1-8m(radius) adjustable Detection Distance
- 360° Detection Range
- 0.6-1.5m/s Detection Motion Speed
- Min 10sec±3sec, Max 12min±1min Time Delay



SKU	Model	Box Qty	Size
4966	VT-8002C	5 pcs	296x96mm

LED DOME LIGHT STARRY COVER



Main features

- IP20 Rating
- SMD Chip
- 2 Years Warranty
- AC:220-240V,50/60Hz
- Body Type: Plastic
- 120° Beam Angle
- Surfaced Installation
- Round
- 20,000 hr lifespan
- On/Off Cycle >15000



SKU	Model	Watts	Lumens	Box Qty	Size
217602 3IN1	VT-8412-S	12W	1200	5 pcs	260x55mm
217604 3IN1	VT-8418-S	18W	1800	5 pcs	310x55mm
217606 3IN1	VT-8424-S	24W	2600	5 pcs	350x55mm
217608 3IN1	VT-8436-S	36W	3900	5 pcs	500x80mm

LED DOME LIGHT MILKY COVER




Main features

- IP20 Rating
- SMD Chip
- 2 Years Warranty
- AC:220-240V,50/60Hz
- Body Type: Plastic
- 120° Beam Angle
- Surfaced Installation
- Round
- 20,000 hr lifespan
- On/Off Cycle >15000



SKU	Model	Watts	Lumens	Box Qty	Size
217603 3IN1	VT-8412-M	12W	1200	5 pcs	260x55mm
217605 3IN1	VT-8418-M	18W	1800	5 pcs	310x55mm
217607 3IN1	VT-8424-M	24W	2600	5 pcs	350x55mm
217609 3IN1	VT-8436-M	36W	3900	5 pcs	500x80mm

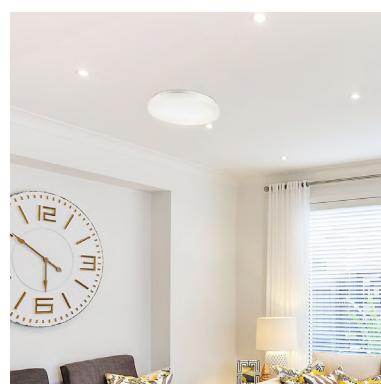



LED Emergency Lights

V-TAC features a line of premium quality LED emergency lights for clear and bright emergency illumination. Complete with easily readable legends, these signs are powered by high performance batteries, rendering a longer lifespan and lower maintenance. V-TAC's emergency lights and signs are a practical and valuable asset in many applications including but not limited to offices, hotels, hospitals and residential areas.

Key Features



- Thermoplastic PC housing
- Single or double face configuration
- Universal (wall, side or ceiling) mounting
- Low energy consumption only 2.0 watts at 120V
- LEDs mounted on print circuit board
- 24 hours recharge after more than 3 Hours discharge

LED EMERGENCY LIGHTS BULKHEAD

The Emergency LED Bulkhead features efficient SMD LED Chips and maintained operation with a 12-hour charging time and 3-hour smooth backup. It offers a viewing distance of 22 meters and can be mounted on either wall or ceiling. Equipped with a high-performance battery for reliable backup and four available legend stickers, it is IP65 rated and comes with a 2-year warranty.

Main features

- 16 SMD LEDs
- AC:220-240V,50/60Hz
- IP65 Rating
- PC Cover
- Wall/ceiling type
- 22 Meters From One side
- >3 Hours Working Time
- Ni-Cd 3.6v,1200mAh battery
- 12 Hours Charging Time
- Green Light Indicator Test
- 4 Stickers
- 4 Ways Legend Available
- Maintained Mode Of Operation



SKU	Model	Watts	Lumens	Box Qty	Size
83111 6400K WHITE	VT-543	3W	140	12 pcs	346x107x60mm

SELF TEST LED EMERGENCY LIGHTS

Main features

- 18 SMD LEDs
- AC:200-240V,50/60Hz
- IP65 Rating
- PC Cover
- >1.2 Emergency Watts
- 22 Meters Viewing Distance
- With Manual Test Button
- >3 Hours Working Time
- LiFePO4 3.2V,1500mAh battery
- 24 Hours Charging Time
- Green Light Indicator Test
- 4 Stickers
- 4 Ways Legend Available
- Maintained/Non-Maintained Mode Of Operation



SKU	Model	Watts	Lumens	Box Qty	Size
7687 6400K WHITE	VT-996	3W	130	20 pcs	350x110x56mm

EXIT LIGHT -BULKHEAD WITH SELF TEST & RF CONTROL

Main features

- 18 SMD LEDs
- AC:200-240V,50/60Hz
- IP65 Rating
- PC Cover
- >1.2 Emergency Watts
- 22 Meters Viewing Distance
- With Manual Test +Self Test + Remote Test
- >3 Hours Working Time
- Ni-Cd 3.6V,1200mAh battery
- 24 Hours Charging Time
- Green Light Indicator Test
- 4 Stickers
- 4 Ways Legend Available
- Maintained/Non-Maintained Mode Of Operation



SKU	Model	Watts	Lumens	Box Qty	Size
7688 6400K WHITE	VT-997	3W	120	20 pcs	350x110x56mm

4IN1 SELF TEST LED EMERGENCY EXIT LIGHT RF CONTROL

Main features

- 20 SMD LEDs
- AC:200-240V,50/60Hz
- IP65 Rating
- PC+PMMA
- 2.5 Emergency Watts
- 30 Meters Viewing Distance
- 4IN1 Hanging,Wall,Side Wall and Ceiling Installation
- >3 Hours Working Time
- Ni-Cd AA 3.6V,600mAh battery
- 24 Hours Charging Time
- Green Light Indicator Test
- 4 Stickers
- 4 Ways Legend Available
- Maintained Mode Of Operation




03 YEAR
WARRANTY


24 hr CHARGING TIME

4IN1

• CEILING
• HANGING
• SIDEWALL
• WALL MOUNTING



SKU	Model	Watts	Lumens	Box Qty	Size
7675 6000K WHITE	VT-995	2.5W	100	10 pcs	350x29x195mm

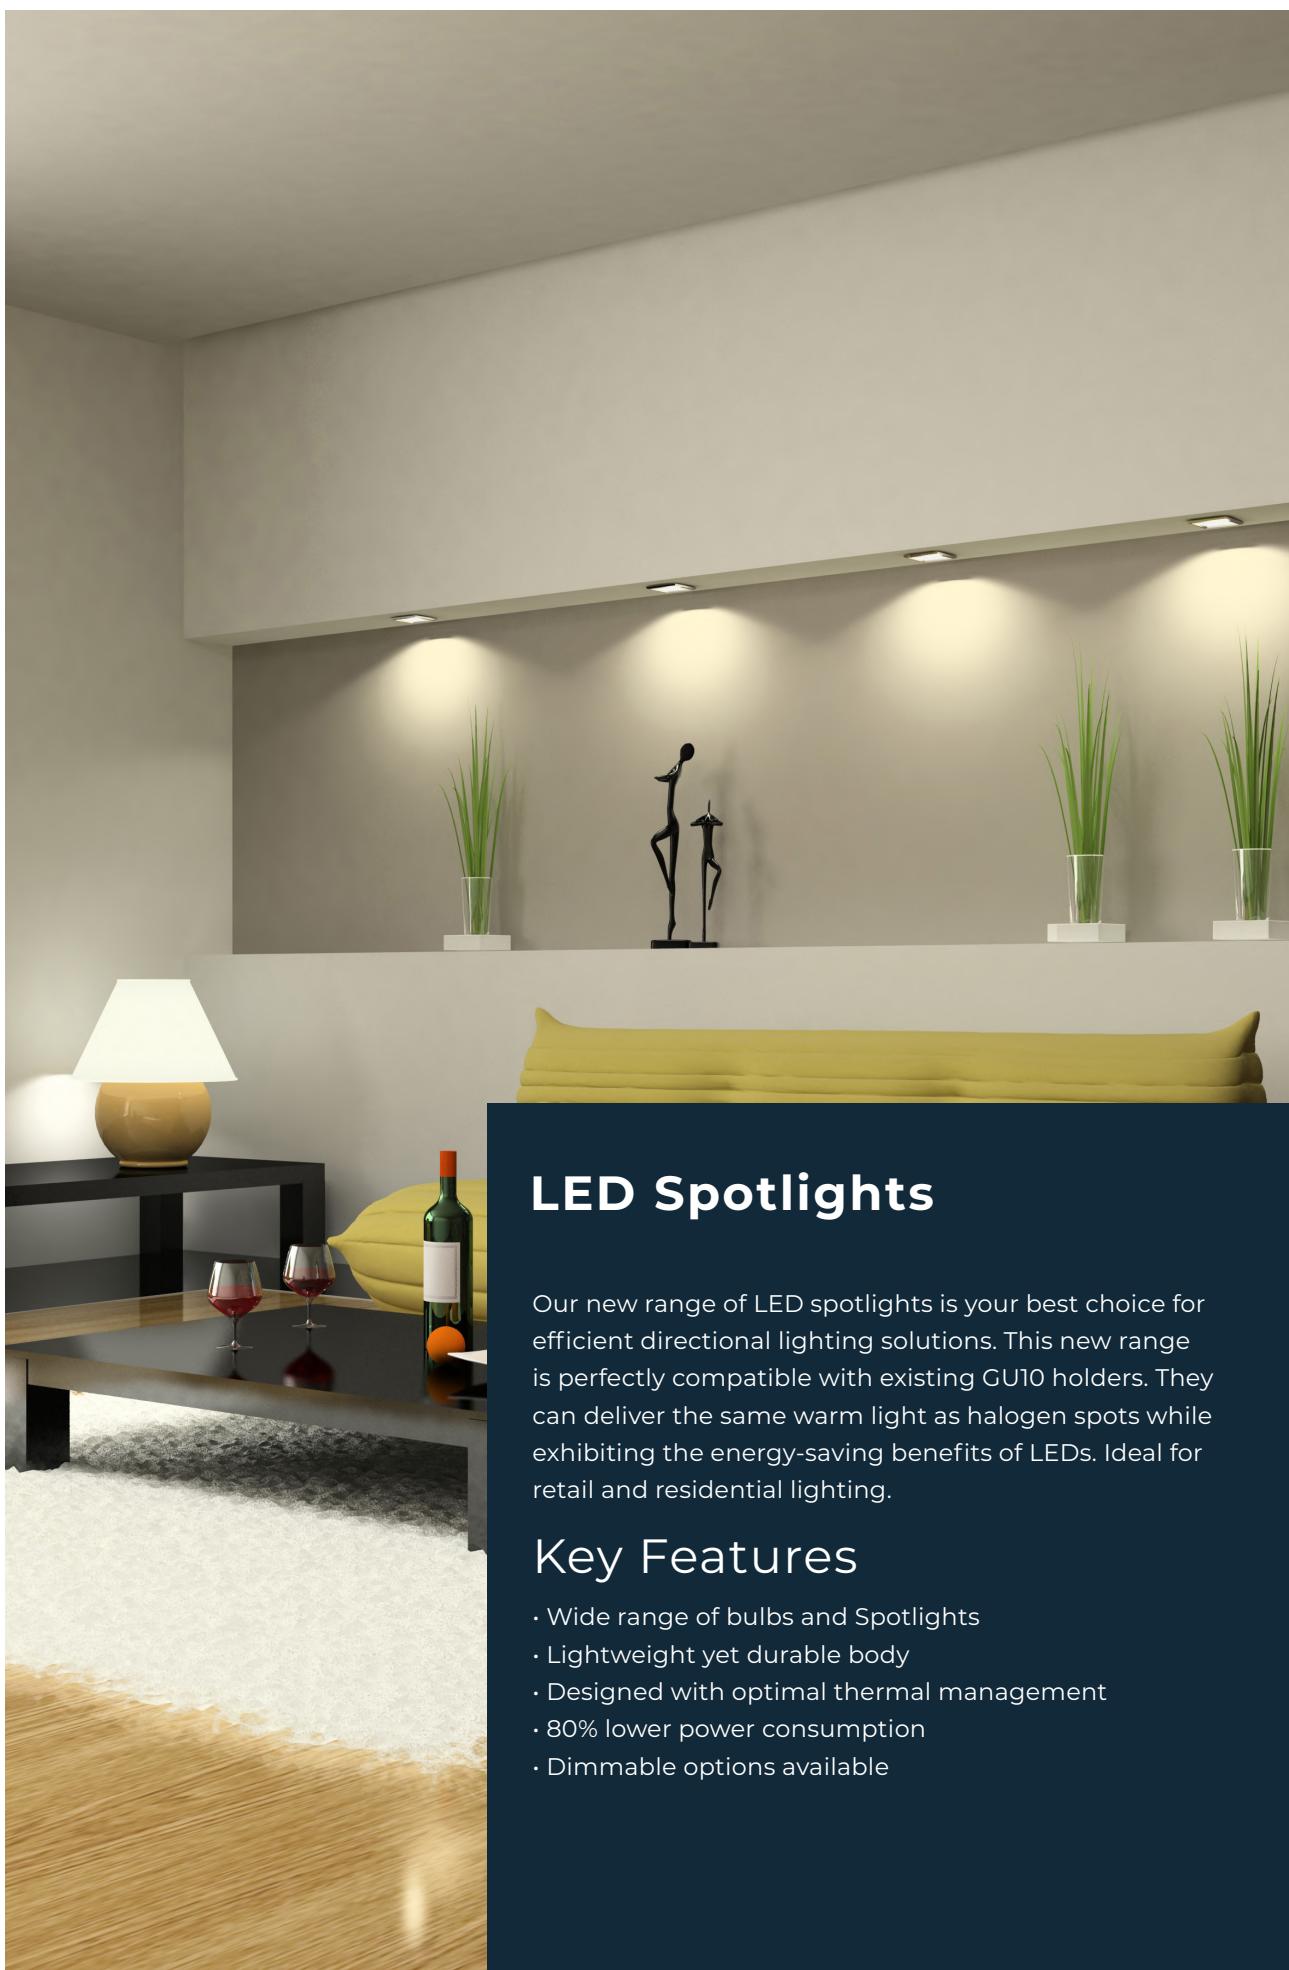

LED Spotlights

Our new range of LED spotlights is your best choice for efficient directional lighting solutions. This new range is perfectly compatible with existing GU10 holders. They can deliver the same warm light as halogen spots while exhibiting the energy-saving benefits of LEDs. Ideal for retail and residential lighting.

Key Features

- Wide range of bulbs and Spotlights
- Lightweight yet durable body
- Designed with optimal thermal management
- 80% lower power consumption
- Dimmable options available

LED SPOTLIGHTS | GU10 | 38° CREE



- 38° Beam Angle
- PF: >0.5
- CRI: >80
- 25,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Plastic Body

SKU	Model	Watts	Lumens	Box Qty	Base	Size
211956 3000K WARM WHITE						
211966 4000K DAY WHITE	VT-227D	6W	445	200 pcs	GU10	50x55mm
211976 6500K WHITE						

LED SPOTLIGHTS | GU10 | 110° CREE



- 110° Beam Angle
- PF: >0.5
- CRI: >80
- 25,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Plastic Body

SKU	Model	Watts	Lumens	Box Qty	Base	Size
212006 6500K WHITE	VT-247D	6W	445	200 pcs	GU10	50x55mm
218746 6500K WHITE	VT-292-C	7.5W	610	200 pcs	GU10	50x55mm

LED SPOTLIGHTS | G9 | 300°



- 300° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Plastic Body

SKU	Model	Watts	Lumens	Box Qty	Base	Size
24024 3000K WARM WHITE	VT-11033	2.2W	200	200 pcs	G9	18x56mm
24025 4000K DAY WHITE						
24026 6500K WHITE						

LED SPOTLIGHT | GU10 | 110° BA | MILKY COVER



- 100° Beam Angle
- PF: >0.4
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Plastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
211685 3000K WARM WHITE	VT-1975-N	4.5W	400	200 pcs	GU10	50x56.5mm
211686 4500K DAY WHITE						
211687 6000K WHITE						

LED SPOTLIGHTS | GU10 | 100° BA | MILKY COVER



02
YEAR
WARRANTY



- 100° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Plastic Body

SKU	Model	Watts	Lumens	Box Qty	Base	Size
218781 3000K WARM WHITE						
218791 4000K DAY WHITE	VT-271	10W	1000	200 pcs	GU10	50x56.5mm
218801 6500K WHITE						

LED SPOTLIGHTS | GU10 | 110° BA



02
YEAR
WARRANTY



- 110° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Plastic Body

SKU	Model	Watts	Lumens	Box Qty	Base	Size
211921 3000K WARM WHITE						
211931 4000K DAY WHITE	VT-247-N	6W	445	200 pcs	GU10	50x55mm
211941 6500K WHITE						
211981 3000K WARM WHITE	VT-247D-N	6W	445	200 pcs	GU10	50x55mm
211991 4000K DAY WHITE						
218721 3000K WARM WHITE	VT-292	7.5W	610	200 pcs	GU10	50x55mm
218731 4000K DAY WHITE						


RECESSED FITTING-ROUND-GU10-2PCS PACK



Main features

- Unit Color: Satin Nickel
- Body: Ferrum
- Size: 80x30mm
- Cutting Size: 65mm

SKU	Box Qty
3585	100 pcs




RECESSED FITTING-ROUND-GU10-2PCS PACK



Main features

- Unit Color: White
- Body: Ferrum
- Size: 80x30mm
- Cutting Size: 65mm

SKU	Box Qty
3584	100 pcs




RECESSED FITTING-ROUND-GU10-2PCS PACK



Main features

- Unit Color: Black
- Body: PC
- Size: 81x40mm
- Cutting Size: 63mm

SKU	Box Qty
6641	50 pcs




RECESSED FITTING-ROUND-GU10-2PCS PACK



Main features

- Unit Color: White
- Body: PC
- Size: 81x40mm
- Cutting Size: 63mm

SKU	Box Qty
6640	50 pcs




RECESSED FITTING-ROUND-GU10



Main features

- Unit Color: Satin Nickel
- Body: Aluminium
- Size: 81x34mm
- Cutting Size: 73mm

SKU	Box Qty
3643	100 pcs




RECESSED FITTING-ROUND-GU10



Main features

- Unit Color: Satin Nickel
- Body: Zinc Alloy
- Size: 82x25mm
- Cutting Size: 74mm

SKU	Box Qty
3588	100 pcs




RECESSED FITTING-ROUND-GU10

**Main features**

- Unit Color: White
- Body: Zinc Alloy
- Size: 82x25mm
- Cutting Size: 74mm

SKU	Box Qty
3587	100 pcs




RECESSED FITTING-ROUND-GU10

**Main features**

- Unit Color: White
- Body: Aluminium+Ferrum
- Size: 100x45mm
- Cutting Size: 90mm

SKU	Box Qty
3595	100 pcs




RECESSED FITTING-ROUND-GU10

**Main features**

- Unit Color: Black
- Body: PC
- Size: 93x55mm
- Cutting Size: 83mm

SKU	Box Qty
6637	50 pcs




RECESSED FITTING-ROUND-GU10

**Main features**

- Unit Color: White
- Body: PC
- Size: 93x55mm
- Cutting Size: 83mm

SKU	Box Qty
6636	50 pcs




RECESSED FITTING-ROUND-GU10

**Main features**

- Unit Color: White
- Body: PC
- Size: 102x42mm
- Cutting Size: 85mm

SKU	Box Qty
6658	50 pcs



GU10-HOLDER-PVC CABLE

**Main features**

- Unit Color: White
- Body: Ceramic
- Size: 150mm
- Cutting Size:

SKU	Box Qty
3423	500 pcs




LED Bulbs

Discover the perfect fit with V-TAC's newly enhanced range of LED bulbs. From low to high wattage, our complete selection delivers energy-efficient lighting solutions for your home, office, or business.

Key Features

- Lightweight yet durable body
- Designed with optimal thermal management
- 80% lower power consumption

LED CANDLE BULB | E14



- 200° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000-hour lifespan
- AC:220-240V,50Hz
- IP20
- Thermoplastic Body

SKU	Model	Watts	Lumens	Box Qty	Base	Size
2142151 3000K WARM WHITE						
2142581 4000K DAY WHITE	VT-1855-N	4.5W	470	200 pcs	E14	36.5x100mm
2142411 6500K WHITE						

LED GOLF BULBS | E27 | G45



- 180° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V, 50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
217407 3000K WARM WHITE						
217408 4000K DAY WHITE	VT-1879N-N	4.5W	470	200 pcs	E27	45x80mm
217409 6500K WHITE						

LED GOLF BULB | E14 | P45



- 180° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V, 50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
2142501 3000K WARM WHITE						
2142511 4000K DAY WHITE	VT-1880N-N	4.5W	470	200 pcs	E14	45x80mm
2142521 6500K WHITE						

LED A60 BULBS | E27




- 200° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V, 50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
217260 3000K WARM WHITE						
217261 4000K DAY WHITE	VT-2099-N	8.5W	806	200 pcs	E27	60x108mm
217262 6500K WHITE						
217350 3000K WARM WHITE						
217349 4000K DAY WHITE	VT-2112-N	10.5W	1055	100 pcs	E27	60x110mm
217351 6500K WHITE						

LED A65 BULBS | E27




- 200° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
214454 4000K DAY WHITE 214455 6500K WHITE	VT-2015-E27-N	15W	1521	100 pcs	E27	65x134mm
214456 3000K WARM WHITE 214457 4000K DAY WHITE	VT-2017-N	17W	1710	100 pcs	E27	65x134mm

LED GLOBE BULBS | G120 | E27



- 200° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
23883 3000K WARM WHITE 23884 4000K DAY WHITE 23885 6500K WHITE	VT-242	22W	2600	100 pcs	E27	120x160mm

LED PAR BULBS | E27



- 40° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
23890 3000K WARM WHITE						
23891 4000K DAY WHITE	VT-238	12.8W	930	30 pcs	E27	121x130mm
23892 6500K WHITE						

LED REFLECTOR BULB- | E14



- 120° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
23894 3000K WARM WHITE						
23896 6500K WHITE	VT-250	4.8W	470	200 pcs	E14	50x85mm

LED REFLECTOR BULB | E27




- 120° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
23897 3000K WARM WHITE	VT-263	8.5W	806	100 pcs	E27	63x100mm
23898 4000K DAY WHITE						
23899 6500K WHITE						


LED BULBS | GX53



- 120° Beam Angle
- PF: >0.5
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V,50Hz
- IP20
- Thermoplastic Body



SKU	Model	Watts	Lumens	Box Qty	Base	Size
23901 3000K WARM WHITE	VT-207	6.4W	560	200 pcs	GX53	79x29mm
23902 4000K DAY WHITE						
23903 6500K WHITE						

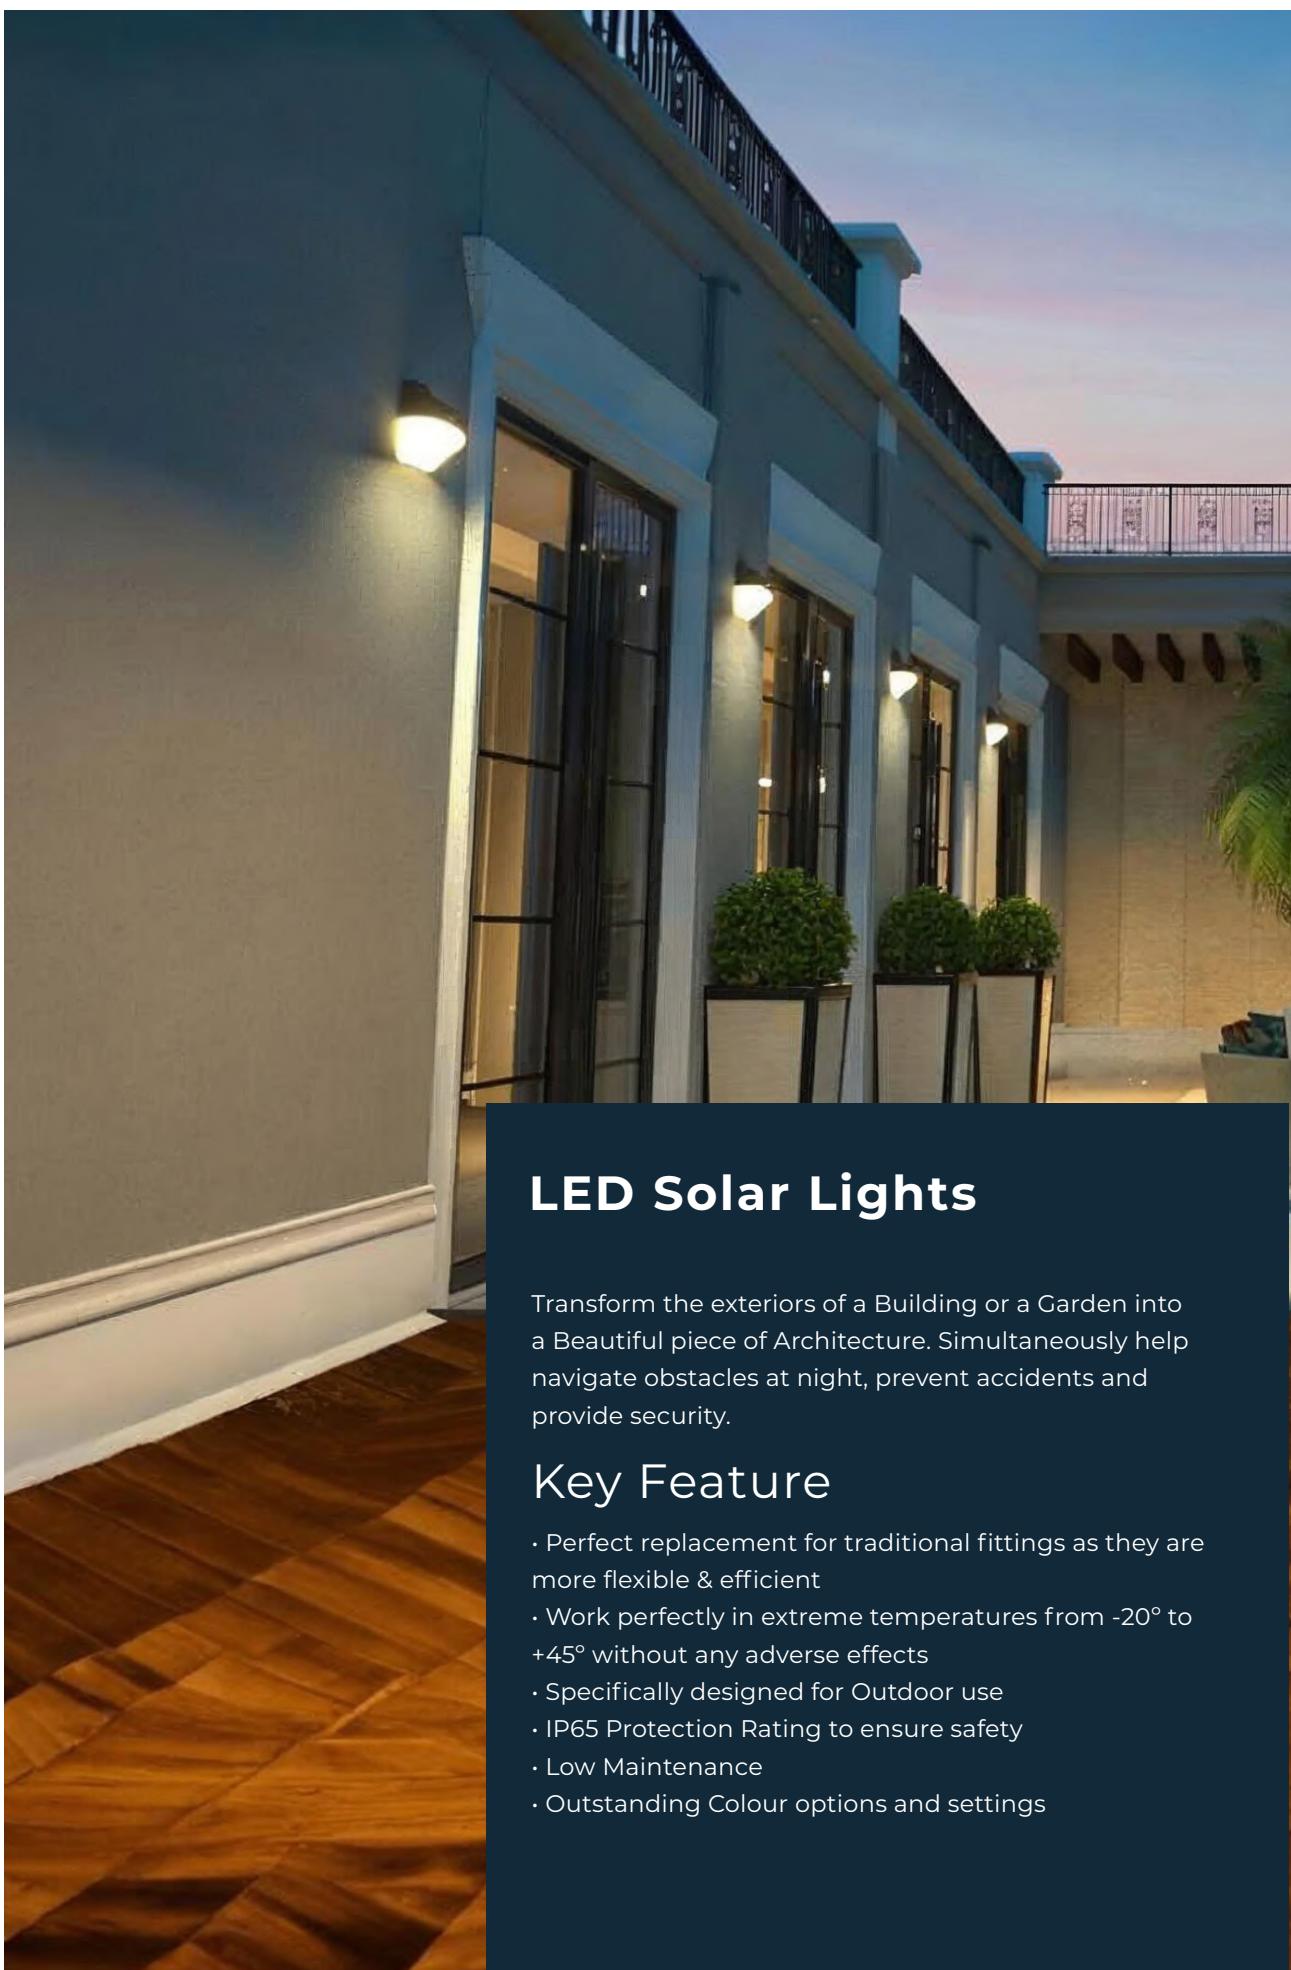

LED Solar Lights


Transform the exteriors of a Building or a Garden into a Beautiful piece of Architecture. Simultaneously help navigate obstacles at night, prevent accidents and provide security.

Key Feature

- Perfect replacement for traditional fittings as they are more flexible & efficient.
- Work perfectly in extreme temperatures from -20° to +45° without any adverse effects
- Specifically designed for Outdoor use
- IP65 Protection Rating to ensure safety
- Low Maintenance
- Outstanding Colour options and settings

LED SOLAR STREETLIGHT

This all-in-one solar streetlight features high-quality SMD LEDs, a PIR sensor, and no wiring. It offers automatic lux adjustment, a 120° detection angle, and a 3-8m sensing range. With IP65 rating, 6-7 hours of charging, and 2-36 hours of backup, it's ideal for outdoor spaces



Main features

- Detecting Angle: 120°
- Sensing Range: 3-8M
- Charging Time: 6-7 hr
- Working Time: 2-36 hr
- IP Rating:IP65
- Body Type:ABS+PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
8549 4000K DAY WHITE 8548 6000K WHITE	VT-ST15	10W	1600	10 pcs	7.4V-10800mAh	413x232x58mm
5503 4000K DAY WHITE 5504 6000K WHITE	VT-ST42	40W	6000	4 pcs	9.6V-12000mAh	289.7x73.6x706.1mm

LED SOLAR STREETLIGHT

Solar Powered streetlight - Zero electricity cost, designed with Remote control, Auto and timer function. It offers 4-6 hours of charging time with 8-12 hours of working time and comes with a remote for time adjustment. IP65 rated and backed by a 2-year warranty, this series is ideal for exterior application



Main features

- Charging Time: 4-6 hr
- Working Time: 8-12 hr
- IP Rating:IP65
- Body Type:Aluminium



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
5502 4000K DAY WHITE	VT-ST200	50W	4000	1 pcs	6.4V-27500mAh	228x670x510mm

LED SOLAR TRI-PROOF LIGHT WITH SENSOR

The solar-powered batten fitting is IP65 rated and waterproof, featuring a motion sensor and 3-in-1 color temperature control. It can be operated by remote to adjust color, sensing range, and time duration. With a 5-meter wire for easy solar panel connection, it's ideal for outdoor applications and comes with a standard 2-year warranty



Main features


- Charging Time: 4-6 hr
- Working Time: 8-10 hr
- IP Rating:IP65
- Body Type:PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
6500 3IN1	VT-120018	18W	1000	10 pcs	3.7V-18,000mAh	1185x80x65

LED SOLAR STRING LIGHT

12 Meter long solar powered string light with 10 G50 bulbs (0.5 watt per bulb), 1.12W Solar Panel with a Lumen Output of 10x30 Lumens it's ideal for outdoor applications with an IP44 rating and comes with a standard 2-year warranty



Main features

- IP Rating:IP44
- Body Type:PVC Wire, Plastic Bulb



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
7804 3000K WARM WHITE	VT-70512	0.5W	300	10 pcs	3.7V-1200mAh	12 Meters
8559 3000K WARM WHITE	VT-71010	1W	100	24 pcs	1.2V-300mAh	2 Meters

SOLAR WALL LIGHT-IP65

The solar-powered wall light uses mono-crystalline solar panels for efficient photo voltaic conversion and lengthy lifespan. PIR sensor for automatic switching on and switching off, it offers a 6-7 hour charging time with Maximum 24 hours of working time. Ideal for outdoor applicationsIP65 rated and comes with a 2-year standard warranty



Main features


- Sensing Range: 2-6 Meters
- Charging Time: 6-7 hr
- Working Time: Upto 24hr
- IP Rating:IP65
- Body Type:ABS+PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
8277 4000K DAY WHITE	VT-762-2-B	1.5W	220	20 pcs	3.7V-1200mAh	144.5x96x79mm
8276 4000K DAY WHITE	VT-762-2-W	1.5W	220	20 pcs	3.7V-1200mAh	144.5x96x79mm

SOLAR WALL LIGHT-IP65

The solar-powered wall light uses mono-crystalline solar panels for efficient photo voltaic conversion and lengthy lifespan. PIR sensor for automatic switching on and switching off, it offers a 6-7 hour charging time with Maximum 24 hours of working time. Ideal for outdoor applicationsIP65 rated and comes with a 2-year standard warranty



Main features


- Sensing Range: 2-6 Meters
- Charging Time: 6-7 hr
- Working Time: Upto 24hr
- IP Rating:IP65
- Body Type:ABS+PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
8279 4000K DAY WHITE	VT-767-7-B	8W	850	8 pcs	3.7V-4000mAh	270x221x109.2mm
8278 4000K DAY WHITE	VT-767-7-W	8W	850	8 pcs	3.7V-4000mAh	270x221x109.2mm

LED SOLAR WALL LIGHT-Brick-Sensor

Brick Series solar wall lights feature high-quality SMD LEDs, a PIR sensor, and 2-in-1 color temperature. They offer up to 50 hours of operation after a 5-hour charge. Durable and IP65-rated, they're perfect for outdoor use with zero electricity cost.



Main features


- Sensing Range: <6 Meters
- Charging Time: 5 hr
- Working Time: Up to 80 hr
- IP Rating:IP65
- Body Type:ABS+PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
10305 4000K+3000K DAY WHITE+WARM WHITE	VT-403-B	3W-Black	350	24 pcs	3.7V-1200mAh	137.6x90.4x35.4mm
10306 4000K+3000K DAY WHITE+WARM WHITE	VT-403-W	3W-White	350	24 pcs	3.7V-1200mAh	137.6x90.4x35.4mm
10307 4000K DAY WHITE	VT-406S-B	6W-Black	900	24 pcs	3.7V-300mAh	230x97x42.7mm
10308 4000K DAY WHITE	VT-406S-W	6W-White	900	24 pcs	3.7V-300mAh	230x97x42.7mm


LED COB SOLAR WALL LIGHT-SENSOR

This series of solar wall lights features high-quality COB LED chips and a PIR sensor. With a modern design and durable body, they offer 30 hours of operation after 8 hours of charging. IP65 rated for outdoor use, these lights are easy to install and come with zero electricity costs



Main features


- Detecting Angle: 120°
- Sensing Range: 4-5 Meters
- Charging Time: 8 hr
- Working Time: Upto 30 hr
- IP Rating:IP65
- Body Type:Aluminium+PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
23770 3IN1	VT-409CCT-B	9W	800	12 pcs	3.7V-2600mAh	150x153x150mm
23824 3IN1	VT-409CCT-C	9W	800	12 pcs	3.7V-2600mAh	150x153x150mm

LED SOLAR WALL LIGHT-PANDA-SENSOR

Solar Light built with highly efficient SMD chips, a PIR sensor with elegant white and black finish. They offer up to 35 hours of operation after a 5-hour charge. Durable and IP65-rated, they're perfect for outdoor use with zero electricity cost.



Main features


- Detecting Angle: 120°
- Sensing Range: <6 Meters
- Charging Time: 5 hr
- Working Time: Up to 35 hr
- IP Rating:IP65
- Body Type:ABS+PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
10309 4000K DAY WHITE	VT-422	2W	200	24 pcs	3.7V-1200mAh	138.9x68.5x106.9mm

LED SOLAR WALL LIGHT-DIAMOND

Solar Wall Light Diamond series built with highly efficient SMD chips, a PIR sensor with elegant black finish. They offer up to 80 hours of operation after a 7-hour charge. Durable and IP65-rated, they're perfect for outdoor use with zero electricity cost.



Main features


- Detecting Angle: 120°
- Sensing Range: <8 Meters
- Charging Time: 7 hr
- Working Time: Up to 80 hr
- IP Rating:IP65
- Body Type:ABS+PC



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
23004 6000K+4000K WHITE+DAY WHITE	VT-425	15W	1900	4 pcs	3.2V-6000mAh	257x288.5x206.5mm

LED SOLAR SPIKE/WALL MOUNT LIGHT

CCT 3IN1 LED Solar Garden Light with 2IN1 Spike and Wall Mount installation
6-8 Hours Charging and 10-12 Hours of Working Time, IP65 rated and backed
by a 3-year warranty.



Main features

- Charging Time: 6-8 hr
- Working Time: 10-12 hr
- IP Rating:IP65
- Body Type:ABS



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
23996 3IN1	VT-10183	1.3W	100	20 pcs	3.7V-1200mAh	114x175x310mm

LED SOLAR SPIKE/WALL MOUNT LIGHT

CCT 3IN1 LED Solar Garden Light with 2IN1 Spike and Wall Mount installation
6-8 Hours Charging and 10-12 Hours of Working Time, IP65 rated and backed
by a 3-year warranty.



Main features

- Charging Time: 6-8 hr
- Working Time: 10-12 hr
- IP Rating:IP65
- Body Type:ABS



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
23757 3IN1	VT-41009	1.5W	80	20 pcs	3.7V-1200mAh	145x84x215mm

LED SOLAR SPIKE/STAND LIGHT

CCT 3IN1 LED Solar Garden Light with 2IN1 Spike and Stand installation 6-8 Hours Charging and 10-12 Hours of Working Time, IP65 rated and backed by a 3-year warranty.



Main features


- Charging Time: 6-8 hr
- Working Time: 10-12 hr
- IP Rating:IP65
- Body Type:ABS



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
23997 3IN1	VT-10185	1.7W	80	10 pcs	3.7V-1500mAh	160x95x975mm

LED SOLAR SPIKE/STAND LIGHT

CCT 3IN1 LED Solar Garden Light with 2IN1 Spike and Stand installation 6-8 Hours Charging and 10-12 Hours of Working Time, IP65 rated and backed by a 3-year warranty.



Main features

- Charging Time: 6-8 hr
- Working Time: 10-12 hr
- IP Rating:IP65
- Body Type:ABS



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
10304 3IN1	VT-4102	2W	220	10 pcs	3.7V-2600mAh	155x720mm

LED SOLAR SPIKE LIGHT

These solar garden spike lights feature two lights with separate lithium batteries connected to one solar panel. They charge in 4-6 hours and work for 3-12 hours, with a 4-meter wire for flexible installation. IP65 rated and backed by a 3-year warranty.



03 YEAR
WARRANTY



Main features

- Charging Time: 4-6 hr
- Working Time: 3-12 hr
- IP Rating:IP65
- Body Type:Polycrystalline Solar Panel



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
20488 3000K WARM WHITE	VT-11031	1.2Wx2	90x2	20 pcs	3.7V-4000mAh	60x75x250mm
20489 3000K WARM WHITE	VT-11032	1.2Wx3	50x3	10 pcs	3.7V-4000mAh	60x75x250mm

LED SOLAR SPIKE LIGHT




Main features

- Charging Time: 6-8 hr
- Working Time: 10-12 hr
- IP Rating:IP65
- Body Type:ABS



SKU	Model	Watts	Lumens	Box Qty	Battery	Size
6660 3000K WARM WHITE	VT-952	2W	40	20 pcs	3.7V-1200mAh	140x150x280mm
6661 4000K DAY WHITE						
6662 6400K WHITE						


LED SOLAR PANEL STRIP KIT-IP67-2IN1

Main features

- IP Rating:IP67



SKU	Model	Watts	Box Qty	Battery	Size
23044 3000K WARM WHITE					
23045 4000K DAY WHITE					
23046 RGB	VT-2835 60	1.2W	20 pcs	3.7V-1500mAh	5 Meters

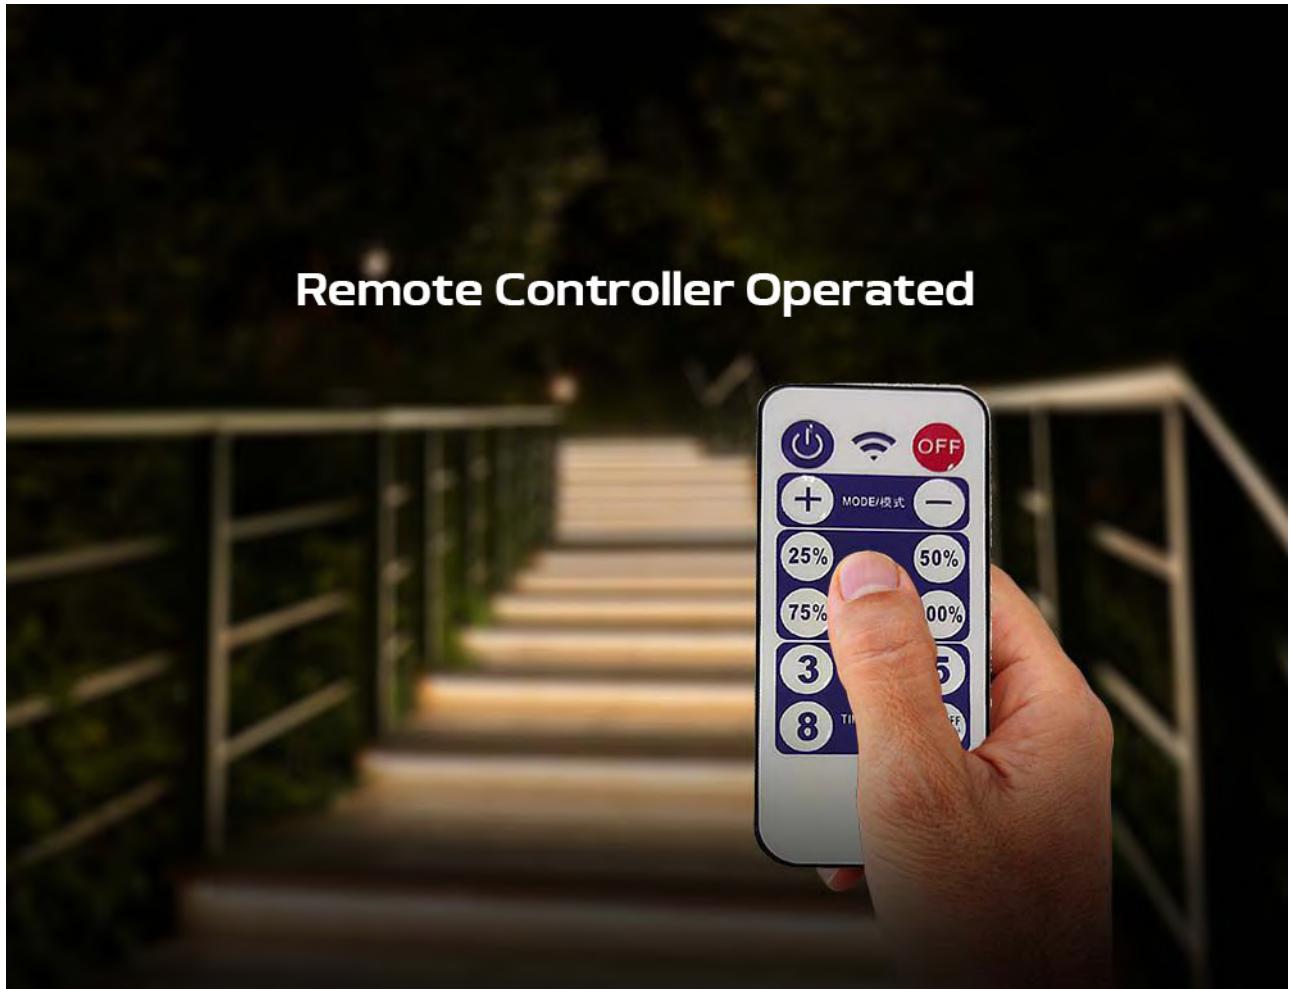Remote Controller Operated

LED UP-DOWN WALL LIGHTS

Featuring a stylish and modern design, this LED up-down wall light provides 2-way illumination with adjustable beam angles and Bridgelux chips. Its die-cast aluminum body ensures excellent heat dissipation, and it is IP65 rated for durability. Comes with a 2-year warranty



Main features

- 120° Beam Angle
- PF: >0.45
- CRI: >80
- 20,000 Hours lifespan
- AC:220-240V, 50Hz
- IP65
- Aluminium Body



SKU	Model	Watts	Lumens	Box Qty	Colour	Size
217079 3000K WARM WHITE 217088 4000K DAY WHITE	VT-759-W	5W	700	20 pcs	White	100x100x100mm
217078 3000K WARM WHITE 217087 4000K DAY WHITE	VT-759-B	5W	700	20 pcs	Black	100x100x100mm
218527 3000K WARM WHITE 218528 4000K DAY WHITE	VT-759-12-W	11W	1360	20 pcs	White	100x100x100mm
218529 3000K WARM WHITE 218530 4000K DAY WHITE	VT-759-12-B	11W	1360	20 pcs	Black	100x100x100mm

UNDERGROUND FITTING | GU10



Main features

- AC:220-240V,50Hz
- IP67
- Stainless Steel Body



SKU	Model	Box Qty	Size
10374	VT-1127RD	50 pcs	80x102mm

UNDERGROUND FITTING | GU10



Main features

- AC:220-240V,50Hz
- IP67
- Stainless Steel Body



SKU	Model	Box Qty	Size
10375	VT-1127SQ	50 pcs	80x80x102mm

GARDEN SPIKE BLACK | IP65

Main features

- AC:220-240V,50Hz
- IP65
- Aluminium Body



SKU	Model	Box Qty	Size
7571	VT-7701	20 pcs	100x92x270mm

GARDEN SPIKE BLACK | IP65

Main features

- AC:220-240V,50Hz
- IP65
- Aluminium Body



SKU	Model	Box Qty	Size
7572	VT-7704	20 pcs	100x130x270mm

GARDEN SPIKE BLACK | IP65

Main features

- AC:220-240V,50Hz
- IP65
- Aluminium Body



SKU	Model	Box Qty	Size
10372	VT-1119	50 pcs	88x75x245mm

GARDEN SPIKE BLACK | IP65

Main features

- AC:220-240V,50Hz
- IP65
- Aluminium Body



SKU	Model	Box Qty	Size
10373	VT-1126	50 pcs	105x75x245mm



LED Strip Lights & Mounting Kits

Add an extensive array of lights and colors to any setting, rejuvenate and transform the ambience of any environment at the flick of a switch with V-TAC's LED Strip Light Series. Easy installation with minimal space required makes this the right choice for Restaurants, Auditoriums, Meeting Rooms etc.




V-TAC's range of strip lights and aluminum profiles are developed with the sole purpose of adding a constantly stylish way of lighting. Coupled with our diverse range of accessories and controllers, these stylish lights can be installed in a variety of ways and applications.

Key Feature

- Flexible & easy installation
- Exceptionally low power consumption
- Multiple visual effects in unending colours and shades

LED STRIP LIGHTS IP20

LED SMD Strip Lights, powered by 24V and 8W/m, offer exceptional color rendering with smooth, uniform output and double PCB. Featuring 3000K, 4000K, 6500K color temperature and a flexible design, they ensure easy installation and customization. IP20 perfect for indoor use.



5
METER
ROLL

 **IP20
RATING**


- **DC:24V**
- 120 LEDs/m
- IP20 Rating
- SMD Chip Type
- 120° BA
- CRI: >80



SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
23024 3000K WARM WHITE						
23025 4000K DAY WHITE	VT-2835 120	8W	800lm	20-22lm	400 pcs	3mm
23026 6500K WHITE						

LED STRIP LIGHTS IP65

LED SMD Strip Lights, powered by 12V and 4.2W/m, offer exceptional color rendering with smooth, uniform output and double PCB. Featuring 3000K, 4500K color temperature and a flexible design, they ensure easy installation and customization. IP65 perfect for outdoor use.



5
METER
ROLL

 **IP65
RATING**


- **DC:12V**
- 60 LEDs/m
- IP65 Rating
- SMD Chip Type
- 120° BA
- CRI: >80



SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
212032 3000K WARM WHITE						
212043 4500K DAY WHITE	VT-3528 60	4.2W	420lm	7-8lm	400 pcs	8.8mm

LED STRIP LIGHTS IP65

LED SMD Strip Lights, powered by 12V and 8W/m, offer exceptional color rendering with smooth, uniform output. Featuring 3000K, 4000K, 6500K color temperature and a flexible design, they ensure easy installation and customization. IP65 perfect for outdoor use.




- **DC:12V**
- 120 LEDs/m
- IP65 Rating
- SMD Chip Type
- 120° BA
- CRI: >80



SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
212038 3000K WARM WHITE	VT-3528 120	8W	800lm	6-7lm	400 pcs	9.2mm
212044 4000K DAY WHITE						
212037 6500K WHITE						

LED STRIP LIGHTS IP65

LED SMD Strip Lights, powered by 12V and 11W/m, offer exceptional color rendering with smooth, uniform output. Featuring 3000K, 4000K, 6500K color temperature and a flexible design, they ensure easy installation and customization. IP65 perfect for outdoor use.



- **DC:12V**
- 60 LEDs/m
- IP65 Rating
- SMD Chip Type
- 120° BA
- CRI: >80



SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
212149 3000K WARM WHITE	VT-5050 60	11W	900lm	14-15lm	400 pcs	11.4mm
212150 4000K DAY WHITE						
212148 6500K WHITE						

COB STRIP LIGHTS IP67

The CRI>80 COB Strip Lights, powered by 24V and 10W/m, offer exceptional color rendering with smooth, uniform output. Featuring 3000K, 4000K, 6500K, Red, Blue, Green and Amber color temperature and a flexible design, they ensure easy installation and customization. IP67 perfect for outdoor use.



5
METER
ROLL

 **IP67**
RATING

 **COB**
LED

Main features


- DC:24V
- 320 LEDs/m
- IP67 Rating
- COB Chip Type
- 120° BA
- CRI: >80



SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
23138 3000K WARM WHITE						
23139 4000K DAY WHITE						
23140 6500K WHITE						
23141 RED	VT-COB 320	10W	840lm	NA	400 pcs	8mm
23142 BLUE						
23143 GREEN						
23144 AMBER						

COB STRIP LIGHTS IP20

The CRI>80 COB Strip Lights, powered by 24V and 10W/m, offer exceptional color rendering with smooth, uniform output. Featuring 3000K, 4000K, 6500K color temperature and a flexible design, they ensure easy installation and customization.



5
METER
ROLL

 **IP20**
RATING

 **COB**
LED

Main features


- DC:24V
- 280 LEDs/m
- IP20 Rating
- COB Chip Type
- 120° BA
- CRI: >80



SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
212652 3000K WARM WHITE						
212653 4000K DAY WHITE						
212654 6500K WHITE	VT-COB 280	10W	950lm	NA	400 pcs	8mm

COB STRIP LIGHTS IP20

The CRI>80 COB Strip Lights, powered by 24V and 10W/m, offer exceptional color rendering with smooth, uniform output. Featuring 3000K, 4000K color temperature and a flexible design, they ensure easy installation and customization.



Main features


- DC:24V
- 421 LEDs/m
- IP20 Rating
- COB Chip Type
- 120° BA
- CRI: >80



SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
212667 3000K WARM WHITE	VT-COB 421	10W	960lm	NA	400 pcs	10mm
212668 4000K DAY WHITE						

COB STRIP LIGHTS IP20

The CRI>90 COB Strip Lights, powered by 24V and 13W/m, offer exceptional color rendering with smooth, uniform output. Featuring 3-in-1 color temperature and a flexible design, they ensure easy installation and customization.

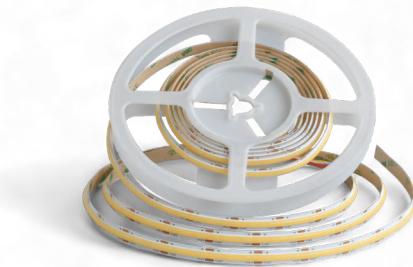


Main features

- DC:24V
- 560 LEDs/m
- IP20 Rating
- COB Chip Type
- 120° BA
- CRI: >90




SKU	Model	Watts	Lumen/M	Lumen/LED	Box Qty	Size
10555 3IN1	VT-COB 560-CCT	2700K - 9W 4000K - 18W 6500K - 9W	500lm - 2700K 1135lm - 4000K 700lm - 6500K	NA	400 pcs	8mm



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
10321	VT-8157	Silver	100 pcs	2000x17.4x7



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.



SKU	Model	Color	Box Qty	Size (mm)
10320	VT-8156	Silver	100 pcs	2000x24.7x7



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
10322	VT-8158	Silver	100 pcs	2000x15.8x15.8

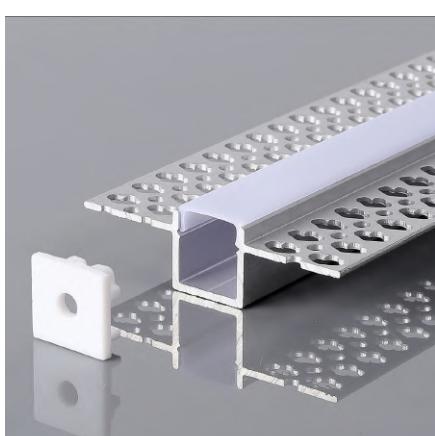

MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
23173	VT-8201	Silver	50 pcs	2000x55x15



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
23174	VT-8202	Silver	50 pcs	2000x20x10



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
23175	VT-8203	Silver	50 pcs	2000x20x10



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.



SKU	Model	Color	Box Qty	Size (mm)
23176	VT-8204S	Silver	40 pcs	2000x30x10



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
23177	VT-8204R	Silver	40 pcs	2000x30x10

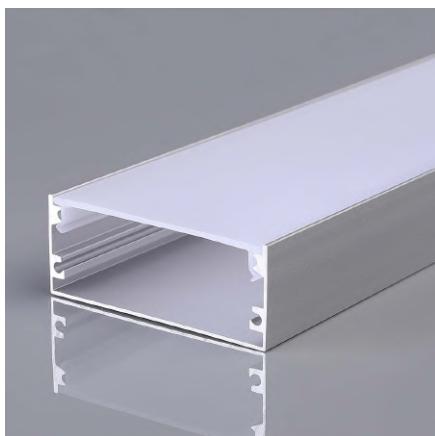

MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
23178	VT-8206S	Silver	20 pcs	2000x50x20



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
23179	VT-8206R	Silver	20 pcs	2000x50x20



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.



SKU	Model	Color	Box Qty	Size (mm)
23180	VT-8208	Silver	10 pcs	2000x60x36



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
3360	VT-8102	Silver	50 pcs	2000x52.1x13.3

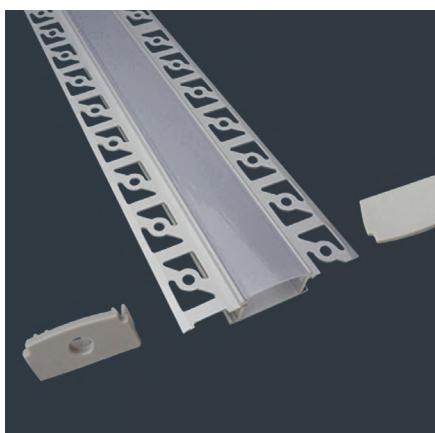

MOUNTING KIT SILVER

The strip mounting kit with a designed trim offers a sleek and recessed installation for strip lights.


SKU	Model	Color	Box Qty	Size (mm)
3359	VT-8101	Silver	30 pcs	2000x61.5x14



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
3361	VT-8103	Silver	50 pcs	2000x50.12x22.34



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
3362	VT-8104	Silver	50 pcs	2000x45.4x25.14



MOUNTING KIT SILVER

The strip mounting kit is designed for surface installation and features a high-quality diffuser to ensure efficient light distribution.


SKU	Model	Color	Box Qty	Size (mm)
3363	VT-8105	Silver	30 pcs	2000x20.3x30



MOUNTING KIT SILVER

The silver strip triangle mounting kit is specifically designed for corner installations.


SKU	Model	Color	Box Qty	Size (mm)
3353	VT-8109-M	Silver	160 pcs	2000x15.8x15.8



MOUNTING KIT SILVER

The strip mounting kit is designed for thin and slim spaces, providing a discreet and efficient solution for installing strip lights.


SKU	Model	Color	Box Qty	Size (mm)
3355	VT-8113-M-S	Silver	100 pcs	2000x17.4x7



MOUNTING KIT WHITE

The strip mounting kit is designed for thin and slim spaces, providing a discreet and efficient solution for installing strip lights.


SKU	Model	Color	Box Qty	Size (mm)
3365	VT-8113-M-W	White	100 pcs	2000x17.4x7



MOUNTING KIT SILVER

The strip mounting kit is designed for thin and slim spaces, providing a discreet and efficient solution for installing strip lights.



SKU	Model	Color	Box Qty	Size (mm)
3370	VT-9327	Silver	200 pcs	2000x16x7



MOUNTING KIT SILVER

The strip mounting kit is designed for thin and slim spaces, providing a discreet and efficient solution for installing strip lights.


SKU	Model	Color	Box Qty	Size (mm)
3350	VT-8106-M	Silver	180 pcs	2000x24.7x7

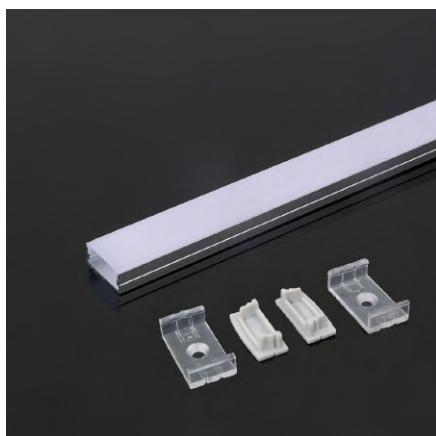

MOUNTING KIT SILVER

The strip mounting kit is designed for both surface and wall installation.


SKU	Model	Color	Box Qty	Size (mm)
3352	VT-8108-M-S	Silver	50 pcs	2000x23.5x10



MOUNTING KIT WHITE

The strip mounting kit is designed for both surface and wall installation.


SKU	Model	Color	Box Qty	Size (mm)
3367	VT-8108-M-W	White	50 pcs	2000x23.5x10



MOUNTING KIT SILVER

The strip mounting kit is designed for both surface and wall installation.


SKU	Model	Color	Box Qty	Size (mm)
3354	VT-8110-M-S	Silver	100 pcs	2000x17.2x14.4



MOUNTING KIT WHITE

The strip mounting kit is designed for both surface and wall installation.


SKU	Model	Color	Box Qty	Size (mm)
3366	VT-8110-M-W	White	100 pcs	2000x17.2x14.4



MOUNTING KIT SILVER

The strip mounting kit is a versatile solution designed for corner installations.



SKU	Model	Color	Box Qty	Size (mm)
3356	VT-8114-M-S	Silver	100 pcs	2000x19x19



MOUNTING KIT WHITE

The strip mounting kit is a versatile solution designed for corner installations.


SKU	Model	Color	Box Qty	Size (mm)
3364	VT-8114-M-W	White	100 pcs	2000x19x19

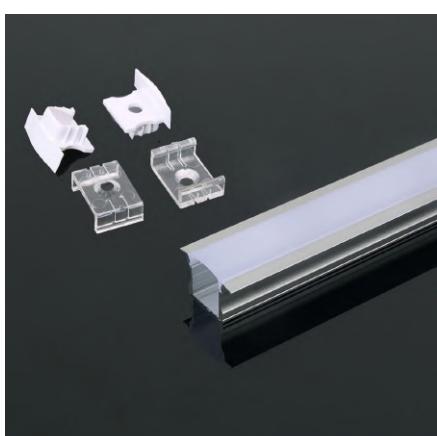

MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
3351	VT-8107	Silver	120 pcs	2000x23x15.5



MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
3357	VT-8115	Silver	50 pcs	2000x24.5x12.2



MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
3358	VT-8116	Silver	50 pcs	2000x17.4x12.1



MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
3371	VT-8118	Silver	50 pcs	2000x30x20



MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
3372	VT-8119	Silver	50 pcs	2000X30.5X20.5



MOUNTING KIT WHITE

The strip mounting kit is a sleek and compact solution for both surface and wall installations.

SKU	Model	Color	Box Qty	Size (mm)
3368	VT-8122	White	100 pcs	2000x24.7x7



MOUNTING KIT WHITE

The strip mounting kit is a sleek and compact solution for both surface and wall installations.

SKU	Model	Color	Box Qty	Size (mm)
3369	VT-8123	White	100 pcs	2000x15.8x15.8



MOUNTING KIT WHITE

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
2871	VT-8126	White	20 pcs	2000x50x35



MOUNTING KIT WHITE

The strip mounting kit is a sleek and compact solution for both surface and wall installations.

SKU	Model	Color	Box Qty	Size (mm)
2872	VT-8127	White	10 pcs	2000x50x75

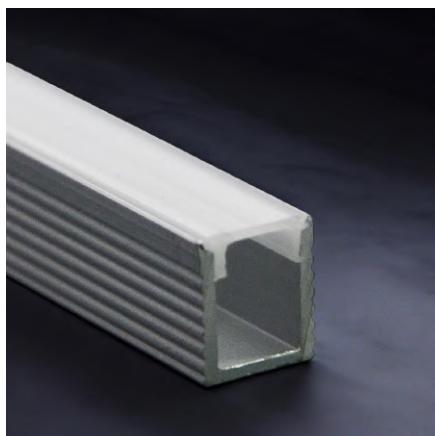

MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.

SKU	Model	Color	Box Qty	Size (mm)
2903	VT-8136	Silver	100 pcs	2000x7.8x9



MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.

SKU	Model	Color	Box Qty	Size (mm)
2904	VT-8137	Silver	100 pcs	2000x12.4x9



MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
2909	VT-8138	Silver	100 pcs	2000x18x6



MOUNTING KIT SILVER

The strip mounting kit is a sleek and compact solution for both surface and wall installations.


SKU	Model	Color	Box Qty	Size (mm)
2610	VT-8117	Silver	75 pcs	2000x11.8x12.5



MOUNTING KIT BLACK

The black strip mounting kit is a discreet surface mount with a high-quality diffuser for efficient light output.


SKU	Model	Color	Box Qty	Size (mm)
2873	VT-8113	Black	100 pcs	2000x17.4x7



MOUNTING KIT BLACK

black finish strip mounting kit, surface, high quality diffuser for efficient light output


SKU	Model	Color	Box Qty	Size (mm)
2874	VT-8109	Black	100 pcs	2000x15.8x15.8



MOUNTING KIT BLACK

The black finish strip mounting kit is a discreet recessed mount with a high-quality diffuser that ensures efficient light distribution, even in limited space configurations.



SKU	Model	Color	Box Qty	Size (mm)
2875	VT-8106	Black	100 pcs	2000x24.7x7



MOUNTING KIT BLACK

The black finish strip mounting kit is a discreet surface mount designed for thin and slim spaces.


SKU	Model	Color	Box Qty	Size (mm)
2876	VT-8108	Black	50 pcs	2000x23.5x10

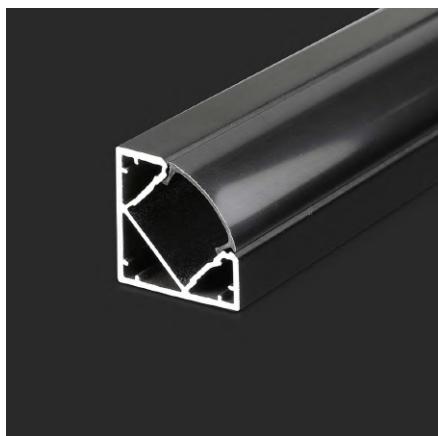

MOUNTING KIT BLACK

The black finish strip mounting kit is a discreet corner mount with a high-quality diffuser that ensures efficient light distribution. This kit fits snugly in corners for a sleek look.

SKU	Model	Color	Box Qty	Size (mm)
2877	VT-8114	Black	50 pcs	2000x19x19



MOUNTING KIT BLACK

The black finish strip mounting kit is a versatile solution for both thick and thin strip lights.

SKU	Model	Color	Box Qty	Size (mm)
2878	VT-8110	Black	100 pcs	2000x17.2x14.4



LED POWER SUPPLY-PLASTIC



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3237	VT-23019	18W	1.5A	AC: 100-264V,50/60Hz	DC:12V	73x27x43mm	120 pcs

LED POWER SUPPLY-PLASTIC



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3238	VT-23031	30W	2.5A	AC: 100-264V,50/60Hz	DC:12V	119x52x32mm	50 pcs
3249	VT-23043	42W	3.5A	AC: 100-265V,50/60 Hz	DC:12V	119x52x32mm	50 pcs
3239	VT-23061	60W	5A	AC: 100-264V,50/60Hz	DC:12V	119x52x32mm	50 pcs
3264	VT-25060	60W	2.5A	AC: 100-264V,50/60Hz	DC:24V	119x52x32mm	50 pcs
3240	VT-23079	78W	6.5A	AC: 100-264V,50/60Hz	DC:12V	119x52x32mm	50 pcs
3272	VT-22078	78W	3.25A	AC: 100-264V,50/60Hz	DC:24V	119x52x32mm	50 pcs

LED POWER SUPPLY-PLASTIC



SKU	Model	Watts	Current Capacity	Input Power	Output	Box Qty
2671	VT-23032	30W	2.5A	AC: 100-240V,50/60Hz	DC:12V	100 pcs
2672	VT-23044	42W	3.5A	AC: 100-240V,50/60Hz	DC:12V	100 pcs

LED POWER SUPPLY-PLASTIC



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3035	VT-23060	60W	5A	AC: 100-265V,50/60Hz	DC:12V	119x52x32mm	50 pcs

LED POWER SUPPLY-PLASTIC



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3236	VT-22101-12V	100W	8A	AC: 100-240V,50/60Hz	DC:12V	192x52x37mm	25 pcs
3101	VT-22101-24V	100W	4.2A	AC: 100-240V,50/60Hz	DC:24V	192x52x37mm	20 pcs

LED POWER SUPPLY-PLASTIC



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3271	VT-21030	30W	2.5A	AC: 100-240V, 50/60Hz	DC:12V	150x40x30mm	60 pcs
3234	VT-22061	60W	5A	AC: 100-240V, 50/60Hz	DC:12V	166x43x33mm	40 pcs
3252	VT-22065	60W	5A	AC: 100-240V, 50/60Hz	DC:12V	166x43x33mm	40 pcs
3235	VT-22075	75W	6A	AC: 100-240V, 50/60Hz	DC:12V	166x43x33mm	40 pcs
3251	VT-22105	100W	8.3A	AC: 100-240V, 50/60Hz	DC:12V	192x52x37mm	25 pcs
3248	VT-22153	150W	12.5A	AC: 100-240V, 50/60Hz	DC:12V	192x62x38mm	20 pcs
3250	VT-22155	150W	12.5A	AC: 100-240V, 50/60Hz	DC:12V	192x62x38mm	20 pcs

RAINPROOF POWER SUPPLY



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3070	VT-21060	60W	5A	AC:200-240V, 50Hz	DC:12V	125x74x42mm	30 pcs

LED POWER SUPPLY-METAL-DIMMABLE



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3256	VT-20101D	100W	8.5A	AC:200-240V, 50/60Hz	DC:12V	199x62x31mm	50 pcs
3257	VT-20154D	150W	12.5A	AC:200-240V, 50/60Hz	DC:12V	199x62x31mm	50 pcs
3258	VT-20155D	150W	6.25A	AC:200-240V, 50/60Hz	DC:24V	199x62x31mm	50 pcs

LED POWER SUPPLY-METAL



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3228	VT-20026	25W	2.1A	AC: 100-240V, 50/60Hz	DC:12V	115x40x25mm	100 pcs
3255	VT-20030	30W	2.5A	AC:220-240V, 50Hz	DC:12V	130x50x31mm	120 pcs
3246	VT-20062	60W	5A	AC:100-240V, 50/60Hz	DC:12V	130x50x31mm	125 pcs
3261	VT-20061	60W	2.5A	AC:100-240V, 50/60Hz	DC:24V	130x50x31mm	100 pcs
3247	VT-20077	75W	6A	AC:100-240V, 50/60Hz	DC:12V	130x50x31mm	125 pcs
3243	VT-20122	120W	10A	AC:176-264V, 50/60Hz	DC:12V	190x50x31mm	60 pcs
3262	VT-24120	120W	5A	AC:85-265V, 50/60Hz	DC:24V	190x50x31mm	60 pcs
3253	VT-20153	150W	6.5A	AC:176-264V, 50/60Hz	DC:24V	200x62x31mm	50 pcs
3244	VT-20152	150W	12.5A	AC:176-264V, 50/60Hz	DC:12V	200x62x31mm	60 pcs
3273	VT-22250	250W	10A	AC:200-265V, 50Hz	DC:24V	225x60x30mm	30 pcs
3259	VT-20352	350W	30A	AC:200-240V, 50/60Hz	DC:12V	208x82x32mm	30 pcs
3263	VT-24350	350W	15A	AC:200-240V, 50/60Hz	DC:24V	208x82x32mm	30 pcs
3275	VT-21361	360W	15A	AC:200-240V, 50Hz	DC:24V	208x82x32mm	20 pcs
3274	VT-21360	360W	30A	AC:200-240V, 50Hz	DC:12V	208x82x32mm	20 pcs

LED POWER SUPPLY-METAL



SKU	Model	Watts	Current Capacity	Input Power	Output	Dimension	Box Qty
3231	VT-21151	150W	12.5A	AC:100-264V, 50/60Hz	DC:12V	207x74x42mm	40 pcs
3232	VT-21251	250W	20A	AC:220-240V, 50/60Hz	DC:12V	218x95x50mm	25 pcs
3233	VT-21401	400W	33A	AC:220-240V, 50/60Hz	DC:12V	223x118x50mm	20 pcs
3265	VT-26400	400W	16.6A	AC:100-264V, 50/60Hz	DC:24V	223x118x50mm	20 pcs



Motion Sensors

Many areas like lobbies, parking garages, staircases remain unused for long hours but do need lighting to be lit automatically in case of movement. A motion sensor is a device, which detects movements, and in some cases light conditions and then transmits a signal for illumination.

Key Feature

- Power saving
- Available for indoor and outdoor purposes
- Compatible with most of our models
- Proven quality from reliable suppliers
- Wide range of models to choose from

INFRARED SENSOR

The infrared sensor features 180-degree detection and surfaced installation for a sleek white look. IP44 rated for indoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 300 watts of lighting.



SKU	Model	Unit Color	Box Qty
1354	VT-8048	White	50 pcs

Sensor Type:	Infrared
Detection Range:	180°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 12m(<24°C)
Ambient Light:	<3–2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP44
Dimension:	86.4x86.4x60.4mm
Time Delay:	10Sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 300W (LED)




INFRARED SENSOR

The infrared sensor features 360-degree detection and surfaced installation for a sleek white look. IP20 rated for indoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 300 watts of lighting.



SKU	Model	Unit Color	Box Qty
1355	VT-8049	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 12m(<24°C)
Ambient Light:	<3–2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	Ø88x55mm
Time Delay:	10Sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 300W (LED)



INFRARED SENSOR

The infrared sensor features 360-degree detection and recessed ceiling installation for a sleek white look. IP20 rated for indoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 300 watts of lighting.



SKU	Model	Unit Color	Box Qty
1356	VT-8051	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 6m(<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	76x75.6mm
Time Delay:	10sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 300W (LED)



INFRARED SENSOR

The infrared sensor features a black finish for a sleek look and offers 360-degree detection. Surface-mounted for easy installation on walls or ceilings, it is IP65 rated for outdoor use. Adjustable lux and time settings prevent unnecessary activation, and it controls up to 1000 watts.



SKU	Model	Unit Color	Box Qty
15011	VT-8083	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max 20m(<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP65
Dimension:	86.5x172.5x56mm
Time Delay:	10sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 1000W (LED)



INFRARED SENSOR

The infrared sensor features 360-degree detection and surfaced installation for a sleek white look. IP20 rated for indoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 200 watts of lighting.



SKU	Model	Unit Color	Box Qty
6606	VT-8091	White	100 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:110-240V, 50/60Hz
Detection Distance:	Max.8m (<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	76x20.2mm
Time Delay:	10Sec±3sec to 7min±2min(adjustable)
Rated Load:	Max. 200W (LED)




INFRARED SENSOR

The infrared sensor features 180 or 360-degree detection and surfaced installation for a sleek white look. IP65 rated for outdoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 600 watts of lighting.




SKU	Model	Unit Color	Box Qty
6611	VT-8093-W	White	50 pcs

Sensor Type:	Infrared
Detection Range:	180° / 360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max.12m (<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP65
Dimension:	76x92x62.5mm
Time Delay:	10Sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 600W (LED)



INFRARED SENSOR

The infrared sensor features 180 or 360-degree detection and surfaced installation for a sleek Black look. IP65 rated for outdoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 600 watts of lighting.



INFRARED SENSOR

The infrared sensor features 360-degree detection and recessed installation for a sleek white look. IP20 rated for indoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 400 watts of lighting.



SKU	Model	Unit Color	Box Qty
6610	VT-8093-B	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	180° / 360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max.12m (<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP65
Dimension:	76x92x62.5mm
Time Delay:	10sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 600W (LED)



SKU	Model	Unit Color	Box Qty
6608	VT-8092-W	White	100 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max.8m (<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	Ø50x62mm
Time Delay:	10sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 400W (LED)




INFRARED SENSOR

The infrared sensor features 360-degree detection and recessed installation for a sleek black look. IP20 rated for indoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 400 watts of lighting.



SKU	Model	Unit Color	Box Qty
6609	VT-8092-B	Black	100 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max.8m (<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	Ø50x62mm
Time Delay:	10sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 400W (LED)





INFRARED SENSOR

The infrared sensor features 240-degree detection and corner installation for a sleek black look. IP65 rated for outdoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 600 watts of lighting.





SKU	Model	Unit Color	Box Qty
6612	VT-8094-B	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	240°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 10m(<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP65
Dimension:	125.2x71.4x72.7mm
Time Delay:	10sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 600W (LED)



INFRARED SENSOR

The infrared sensor features 240-degree detection and corner installation for a sleek white look. IP65 rated for outdoor use, it has adjustable lux and time settings to customize sensitivity and timing. It can control up to 600 watts of lighting.



SKU	Model	Unit Color	Box Qty
6613	VT-8094-W	White	50 pcs

Sensor Type:	Infrared
Detection Range:	240°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 10m(<24°C)
Ambient Light:	<3-2000LUX (adjustable)
Body Type:	PC
IP Rating:	IP65
Dimension:	125.2x71.4x72.7mm
Time Delay:	10Sec±3sec to 15min±2min(adjustable)
Rated Load:	Max. 600W (LED)



INFRARED SENSOR

The infrared sensor features a white finish for a sleek look and offers 360-degree detection. Surface-mounted for easy installation on walls or ceilings, it is IP20 rated for indoor use. Adjustable lux and time settings prevent unnecessary activation, and it controls up to 1000 watts.



SKU	Model	Unit Color	Box Qty
5086	VT-8027-W	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 8m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	115x25mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 1000W(LED)




INFRARED SENSOR

The infrared sensor features a black finish for a sleek look and offers 360-degree detection. Surface-mounted for easy installation on walls or ceilings, it is IP20 rated for indoor use. Adjustable lux and time settings prevent unnecessary activation, and it controls up to 1000 watts.



SKU	Model	Unit Color	Box Qty
5087	VT-8027-B	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 8m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	115x25mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 1000W(LED)






INFRARED SENSOR

The infrared sensor features a black finish for a sleek look and offers 360-degree detection. Surface-mounted for easy installation on walls or ceilings, it is IP20 rated for indoor use. Adjustable lux and time settings prevent unnecessary activation, and it controls up to 1000 watts.



SKU	Model	Unit Color	Box Qty
23677	VT-8027-FB	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 7m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	115x25mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 1000W(LED)



INFRARED SENSOR-IP44

The infrared sensor with a white finish offers 180-degree detection. IP44 rated for outdoor use, it mounts easily on walls and controls up to 600 watts. Adjustable lux and time settings prevent false activation.



SKU	Model	Unit Color	Box Qty
4967	VT-8003-W	White	50 pcs

Sensor Type:	Infrared
Detection Range:	180°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 12m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP44
Dimension:	86.4x60.4x98mm
Time Delay:	Min. 10sec±3sec, Max. 7min±2min
Rated Load:	Max 600W(LED)



INFRARED SENSOR-IP44

The infrared sensor with a white finish offers 180-degree detection. IP44 rated for outdoor use, it mounts easily on walls and controls up to 600 watts. Adjustable lux and time settings prevent false activation.



SKU	Model	Unit Color	Box Qty
5077	VT-8003-B	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	180°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 12m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP44
Dimension:	86.4x60.4x98mm
Time Delay:	Min. 10sec±3sec, Max. 7min±2min
Rated Load:	Max 600W(LED)




INFRARED SENSOR

The infrared sensor with a white finish offers 360-degree detection and is IP20 rated for indoor use. It features adjustable lux and time settings to prevent unnecessary activation and controls up to 500 watts



SKU	Model	Unit Color	Box Qty
5090	VT-8029	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 6m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	76x75.6mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 500W(LED)




INFRARED SENSOR

The infrared sensor with a white finish offers 360-degree detection and is IP20 rated for indoor use. It features adjustable lux and time settings to prevent unnecessary activation and controls up to 500 watts



SKU	Model	Unit Color	Box Qty
23769	VT-8029-FB	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 6m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	76x75.6mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 500W(LED)



INFRARED SENSOR-MOVING HEAD

The infrared sensor with a moving head, white finish, 360-degree detection, recessed installation, IP20 rating for indoor use, adjustable lux and time settings, and a maximum load of 400 watts is a versatile and customizable control solution for various lighting applications.



SKU	Model	Unit Color	Box Qty
5091	VT-8030	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 8m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	98x73x82mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 400W(LED)




INFRARED SENSOR-MOVING HEAD

The infrared sensor with a moving head, white finish, 180-degree detection, surfaced installation, IP44 rating for indoor use, adjustable lux and time settings, and a maximum load of 400 watts is a versatile and customizable control solution for various lighting applications.




SKU	Model	Unit Color	Box Qty
5089	VT-8028-B	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	180°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 12m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP44
Dimension:	80.2x55.5x68.2mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 400W(LED)

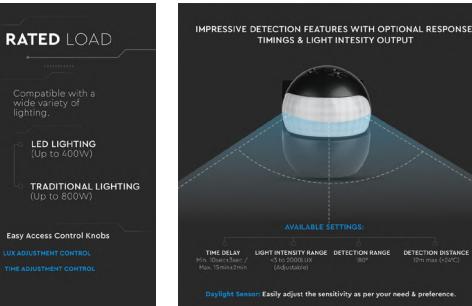

INFRARED SENSOR-MOVING HEAD

The infrared sensor with a moving head, white finish, 180-degree detection, surfaced installation, IP44 rating for indoor use, adjustable lux and time settings, and a maximum load of 400 watts is a versatile and customizable control solution for various lighting applications.



SKU	Model	Unit Color	Box Qty
23678	VT-8028-FB	Black	50 pcs

Sensor Type:	Infrared
Detection Range:	180°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 12m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP44
Dimension:	80.2x55.5x68.2mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 400W(LED)



INFRARED SENSOR

The infrared sensor with white finish, 360-degree detection, surface installation, IP20 rating for indoor use, adjustable lux and time settings, and a maximum load of 300 watts is a versatile and customizable control solution for various lighting applications.



SKU	Model	Unit Color	Box Qty
4968	VT-8004	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	Max. 12m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	PC
IP Rating:	IP20
Dimension:	Ø88x55mm
Time Delay:	Min. 10sec±3sec, Max. 15min±2min
Rated Load:	Max 300W(LED)



MOTION SENSORS

The infrared sensor features hand gesture on/off functionality, 30-degree detection, and an IP20 rating for indoor use. With a maximum load of 200 watts, it provides versatile lighting control.




SKU	Model	Unit Color	Box Qty
5084	VT-8025	White	100 pcs

Sensor Type:	Infrared
Detection Range:	30°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	5cm/6cm(<24°C)
Body Type:	Plastic
IP Rating:	IP20
Dimension:	35.5x78.2x20.6mm
Rated Load:	vMax 200W(LED)



MOTION SENSORS

The infrared sensor provides 120 or 360-degree detection, adjustable distance, time delay, and ambient light settings. IP65 rated for outdoor use, it controls up to 400 watts of lighting fixtures.

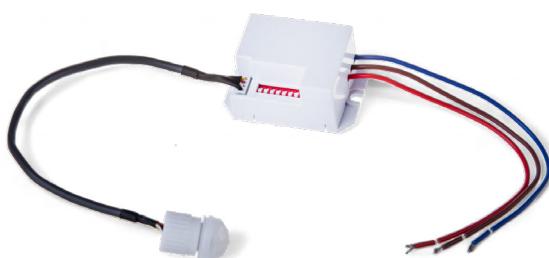

SKU	Model	Unit Color	Box Qty
5082	VT-8022	White	100 pcs

Sensor Type:	Infrared
Detection Range:	120°/360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	3/6m(<24°C)
Ambient Light:	10LUX/2000LUX(choice)
Body Type:	Plastic
IP Rating:	IP65
Dimension:	36.8x25.5x55.4mm
Time Delay:	5s,30s,1min,3min,5min,8min(choice)
Rated Load:	Max 400W(LED)



MOTION SENSORS

The infrared sensor provides 30-degree detection angle, adjustable distance and detects the opening and closing of doors. IP20 rated for indoor use, it controls up to 200 watts of lighting fixtures. Also includes sensitivity detector and integrated circuit.



SKU	Model	Unit Color	Box Qty
5085	VT-8026	White	100 pcs

Sensor Type:	Infrared
Detection Range:	30°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	5cm/6cm(<24°C)
Body Type:	Plastic
IP Rating:	IP20
Dimension:	35.5x78.2x18.7mm
Rated Load:	Max 200W(LED)



MOTION SENSORS

The infrared sensor with E27 holder provides 360-degree detection, adjustable distance, time delay, and ambient light settings. IP20 rated for indoor use, it controls up to 60 watts of lighting fixtures.



SKU	Model	Unit Color	Box Qty
4982	VT-8005	White	50 pcs

Sensor Type:	Infrared
Detection Range:	360°
Voltage:	AC:110-240V, 50/60Hz
Detection Distance:	Max. 6m(<24°C)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	Plastic
IP Rating:	IP20
Dimension:	55.5x116.5mm
Time Delay:	Min. 10sec±3sec, Max. 5min±1min
Rated Load:	Max 60W(LED)



MOTION SENSORS

The customizable microwave sensor provides 180 or 360-degree detection, adjustable distance, time delay, and ambient light settings. IP20 rated for indoor use, it controls up to 300 watts of lighting fixtures



SKU	Model	Unit Color	Box Qty
5078	VT-8018	White	100 pcs

Sensor Type:	Microwave
Detection Range:	180° / 360°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	1-8m(radius) adjustable
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	Plastic
IP Rating:	IP20
Dimension:	37x25x61.5mm
Time Delay:	Min. 10sec±3sec, Max. 12min±1min
Rated Load:	Max 300W(LED)



MOTION SENSORS

The customizable microwave sensor provides 180 degree detection, adjustable distance, time delay, and ambient light settings. IP20 rated for indoor use, it controls up to 300 watts of lighting fixtures



SKU	Model	Unit Color	Box Qty
5083	VT-8023	White	100 pcs



Sensor Type:	Microwave
Detection Range:	180°
Voltage:	AC:220-240V,50/60Hz
Detection Distance:	5m-15m(adjustable)
Ambient Light:	<3-2000LUX(adjustable)
Body Type:	Plastic
IP Rating:	IP20
Dimension:	80x80x32mm
Time Delay:	Min. 10sec±3sec, Max. 12min±2min
Rated Load:	Max 300W(LED)



ELECTRONIC INSECT KILLER

SKU	Model	Watts	Coverage Area	Size	Box Qty
11179	VT-3216	8W	50m2	280x354x93.5mm	6 pcs
11180	VT-3220	10W	80m2	280x397x93.5mm	6 pcs
11181	VT-3230	15W	100m2	280x532x93.5mm	6 pcs
11182	VT-3240	20W	150m2	280x655x93.5mm	4 pcs

An electronic insect killer, often known as an electric fly killer or bug zapper, is a device designed to attract and eliminate flying insects like mosquitoes, flies, and moths. It typically operates using an electric grid or a high-voltage charged wire to electrocute insects that come into contact with it.



- Lamp life time up to 8000-hour
- Slim design - ON/OFF switch
- Removable tray
- For Indoor Use Only
- Housing made of special treated, Aluminium, scratch-proof, corrosion-proof and easy to clean
- Power supply: AC:220–240V 50/60Hz
- Perfect for home, Office, Garage, kitchens, Schools, Hospitals, Courtyard, and Commercial Areas
- Wire chain for hanging or set it on a flat surface.



NON TOXIC CHEMICAL FREE
ECO FRIENDLY



Meaningful Innovation.

TO MAKE THE WORLD
A BRIGHTER PLACE
THROUGH MEANINGFUL
INNOVATION.

Everything we do is strengthened by our purpose to make this world a brighter place, by providing high-quality, efficient, and sustainable products to our customers.

Our idea of a brighter world is where we enable people to make their lives more comfortable and safe while building a sustainable future.

MOVING TOWARDS
SUSTAINABILITY.



Meaningful Innovation.

OUR VISION & MISSION

THE BIGGER PICTURE VISION

To become a global leader in providing the most efficient and sustainable products.

THE DRIVING FORCE MISSION

Harness the power of meaningful innovation into providing absolute value to our customers and the planet.



Meaningful Innovation.

**TOWARDS A
BRIGHTER FUTURE**

www.v-tac.eu | www.led-europe.pl

Sofia Office

V-TAC Europe Ltd
41, bul. Rozhen
1271 Sofia
Bulgaria
www.v-tac.eu
office@v-tac.eu

UK Office

V-TAC House,
Kelppatrick Road,
Slough, Berkshire,
SL1 6BW, UK.
www.v-tac.co.uk
info@v-tac.co.uk

Hungary Office

Népfürdő utca 13. | H-1138
Budapest, Ungarn

Romania Office

Bulevardul Unirii, numărul 33
(vis-a-vis de Institutul Bancar Român),
Bucureşti

Led Europe

Led Europe sp. z o.o.
Ul. Starorudzka 12E
93-418 Łódź Poland

Middle East Office

Unit# 407/8/9 Jumeirah Bay Towers,
Plot# X3, JLT, P.O. Box 45244, Dubai

V-TAC West Europe

Ground Floor, 71 Lower Baggot
Street, Dublin 02, Ireland
D02 P593